



21, rue Robert Vauxion
F-53000 LAVAL
Phone : +33 2 43 53 66 69
info@labadis.com

SAS au capital de 320 000 €
R.C.S. LAVAL 501 641 203



2023-06-12

Table of contents

Flow System with Rollis®

Principles and technics	4
-------------------------	---

Rollis® Trolley

Box transport	5
Flat pieces transport	11
Cylinders transport	17
Bulky pieces transport	21
Granules & liquids transport	25
Wastes transport	29
Transport of specific / customized parts	33

Containers

Plastic Containers	39
--------------------	----

Small train logistic

Manual Towing Material	44
Ergomover Towing Truck	45
Tow Bar	47

Lines side delivery & workstation

Rollis Table	50
Dynamic Rack	51
Mix Rack Rollis & Box	53
Pile Lifter	54
Rollis® Floor Stopper	57
In / Out Kit in Square Pitch	57
Manual assembly line	58

Flat Storage

Storage Dynamic Rack	60
Storage Mix Rack Rollis & Box	61
Rollis® Flat Storage	62

Logistical loop

100% Rollis® Flow	66
Rollis® Dock	67
Rollis® Elevator	68
Rollis® Pallet	69

Kanban System

Kanban System	72
Heijunka and Logistics Boards	73
Picking Loop : Card, Gutter, Desk	74-75
Production Loop : Card, Batch Box, Bucket, Launcher	76-77
Kanban Card Printer	78
Kanban Game	79


Visual Communication

Zoning Floor Tape solution	82
QCDD Management	83
Communication Panels	86

Technical Workshop

Technical consulting in Lean manufacturing	88
The Lab	89

Picture table of contents (page)

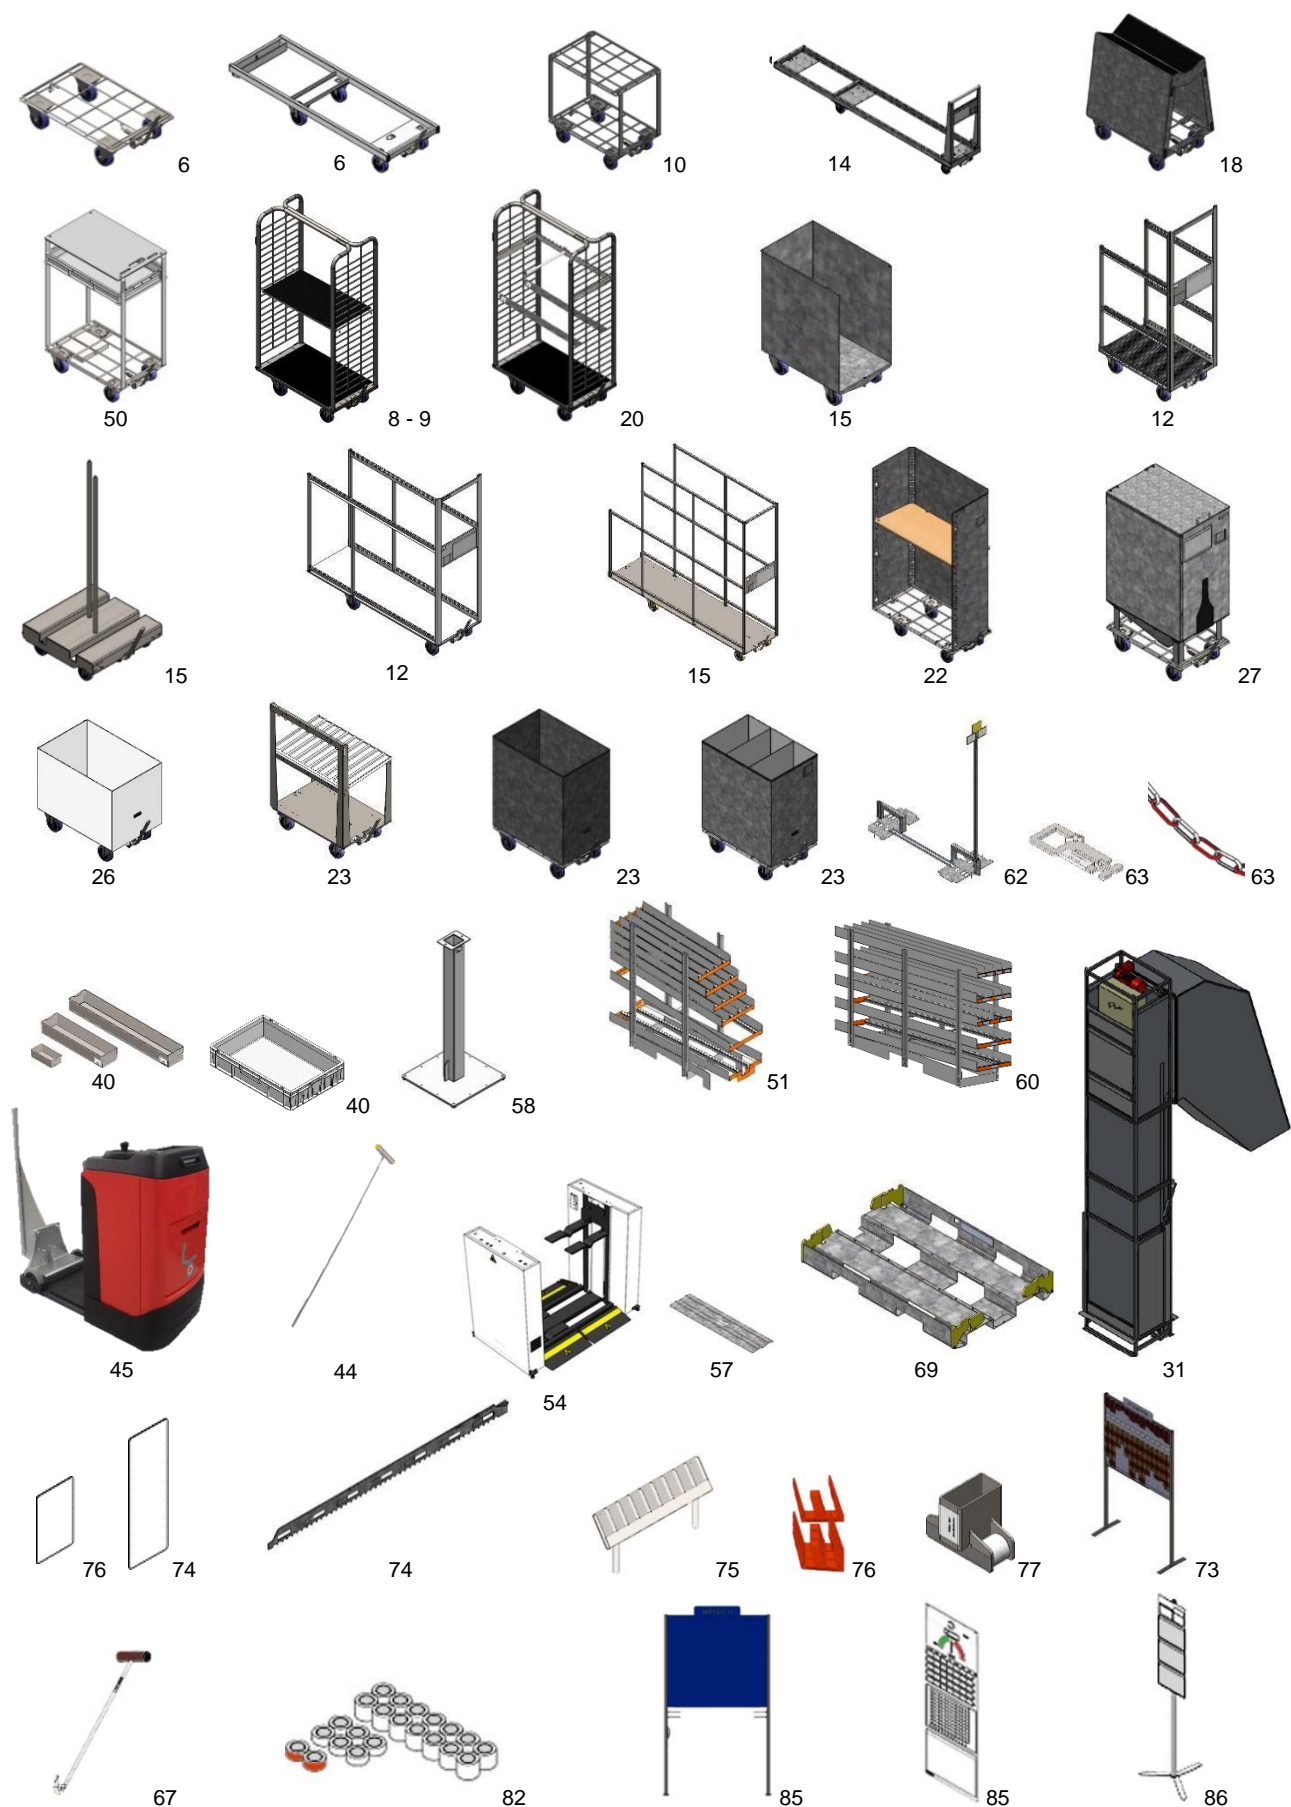

Flows with Rollis®

Make productivity and save space by simplifying your flows

Production flows reflect the company's complexity :

- Diversity of bought, transformed and sold pieces
- Multiple path combinations
- Quantity Variation
- Production, supplier and customer problems

The management systems who manage them rarely integrate these major disparities.

However, it is possible to organize adapted production flows to these situations without adding constraints.

Labadis has developed a simple and modular flow system which is based on:

- transport of pieces in 400 mm wide containers (most common size) to ensure the same packaging unit between the workstation, during transport and storage
- a patented system which enables standardized coupling and uncoupling in less than one second for all types of Rollis trolleys
- Horizontal storage to make products permanently available without loss of space
- A one-way workplace organization for simplicity.
- Direct truck loading with Rollis® to reduce handling
- All production steps managed with Kanban

The system being compatible with all other handling modes, it can be implemented gradually:

- No more forklifts
- Safer for staff and product
- Total staff independence
- All staff become independent

The visual management of stocks allows spotting of all potential supply disruption thus customer delivery times are controlled.

The generalization of the Labadis system generates important productivity gains and return on investment is reached within a year.



Hand-pulled Rollis



Rollis equipment for transport and storage

The Labadis company helps its customers in the physical launch of this organization by proposing technical consulting in your workshop. Employees are the ones who act. Our aim is that this system becomes yours and that you know how to run it yourselves.



Box transport




Rollis®

Transform the handling of parts into a flowing operation manageable by anyone

The Rollis base equipped with a telescopic coupling system (World patent) simplifies the handling and storage of products. It enables:

- To couple and uncouple a pile in less than a second without bending down
- To stop in emergency within a very short distance whatever the total weight transported is
- To gain storage surface without having to undo the coupling
- To couple and uncouple in the middle of the convoy, without having to handle and aim for
- To reduce the transport aisle width
- To transport in trucks without forklift and unload in less than 9 minutes
- To store in plastic containers as well as cardboard boxes
- To manage FIFO without computer assistance

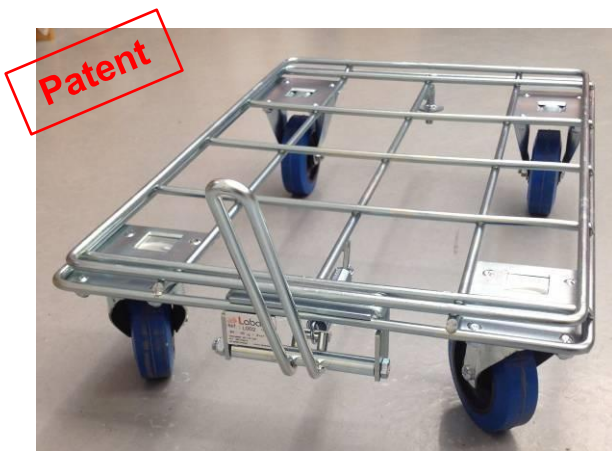

Rollis with telescopic coupling (World patent)




Small train in traction (Mizusumashi)



Emergency stop in less than a meter

Rollis is the central element of a global system that simplifies flows and their control. The generalization of this mode of handling and storage to all flows in a factory generate: workforce productivity gains, suppression of supply disruptions and area lessening.

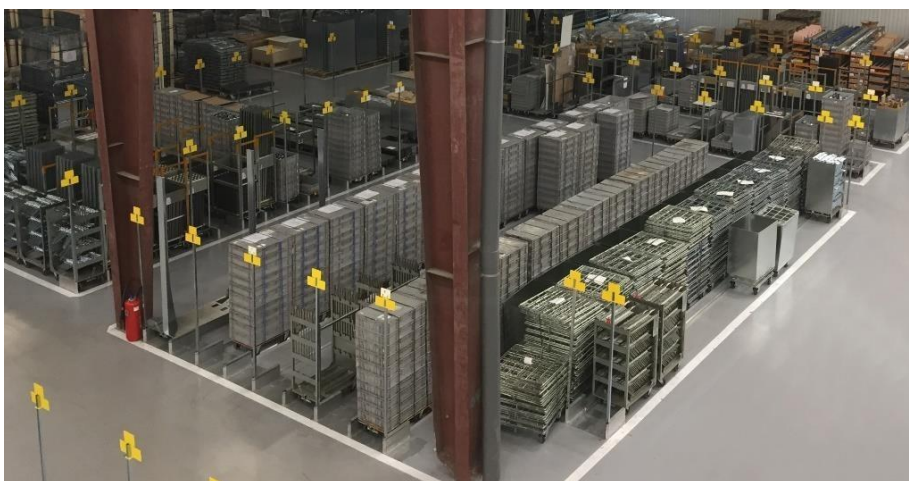

Flat storage enabled by Rollis



Rollis Transport by two story truck

The Rollis trolleys handling is done on a smooth, horizontal and covered ground.

Rollis®		L0031	L0002	L0032	L0033	L0057	L0036	L0037	L0038
Dimensions									
Width	mm	400					600*		
Length	mm	400	600	800	1 000	1 200	600	800	1 000
Height	mm	152							
Weight	kg	6,4	6,9	8	8,5	12,5	8,2	8,7	9,2
Aisle width for a train U-turn	mm	1 100	1 300	1 700	1 900	2 200	1 600	1 800	2 100
Inner Container Centering									
Width	mm	368					568		
Length	mm	368	568	768	968	1160	568	768	968
Height	mm	7							
Inner radius of the container centering frame	mm	6							

* 600 width is to be used if the 3 dimensions are above 400 ([contact us](#)).

Rollis options

Use Conditions		
Maximum used Speed	km / h	8
Floor	Smooth, horizontal and covered	
Maximum continuous rollis Distance	m	500
Maximum Load	kg	180
Maximum Height for a pile	mm	1 300
Room Temperature for Use	°c	-30 +60


Wheels		
Wheel Diameter	mm	100
Rollis	Needle rollers	
Roll bandage	Soft noise and anti-lock	

New



Standard	Stainless	Anti-static ESD	Heavy load	High temperature	Very high temperature	Track & Slide
(A)	(B)	(C)	(D)	(E)	(F)	(AS)
Silent, no tire print and roll over obstacles	For wet environment, Shaft, bearings and flanges in stainless steel	For electronic applications (conductive rear wheels, standard front wheels)	Hard bandage and ball bearings: divided by 2 the traction force, dust-proof	Hard bandage, max temperature 300 ° C	Cast iron bandage, max temperature 500 ° C	Automatic walkout of fixed wheels (change into 4 moving wheels) (info page 28)

Off set path

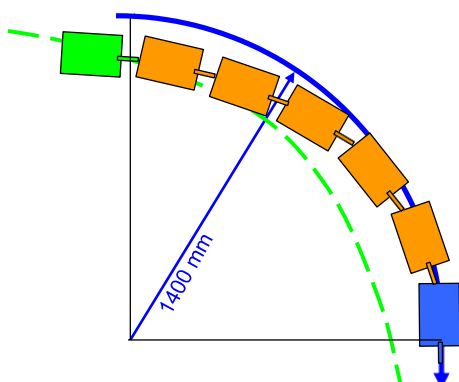

Rollis length	mm	600	800	1 000
Offset per Rollis	mm	90	80	70

Rollis® Wagon

Supply your production lines with the minimum of moving

Rollis Wagon is designed to supply production lines in plastic containers or cardboard boxes.

The telescopic coupling allows the Rollis Wagon to be unattached from the middle in less than 3 seconds.

The supplier can take the Rollis Wagon along the line and distribute the components without going back and forth between the workstation and the train.

The 400 mm wide allows:

- Ergonomic access on both sides to all components stored by the supplier; no need to go around the Rollis Wagon
- Taking can be done without having to lean over to see the contents

It's made of:

- 2 uprights forming handles for an easy grip
- Numbered graduation on the right back post allows an easy position of the shelf
- Wear free hook
- 2 back buffers

A homogeneous filling and at the bottom ensures the Rollis Wagons stability once filled. A ballast can also be added.



Rollis Wagon with 3 shelves



Supply with only one Rollis Wagon untied from the train



Numbering on the post to position the shelves



Rollis train and Rollis Wagon for a line supply

Empty Rollis® Wagon		L0097
Dimensions		
Width	mm	400
Length	mm	690
Height	mm	1 300
Weight	kg	23
Conditions of Use		
Free Inner Height	mm	1 125
Free Inner Length	mm	632
Maximum Load	kg	100
Shelf support		
Setting interval for shelves	mm	50
Height from the floor to the highest shelf	mm	1 100
Height from the floor to the lowest shelf	mm	150



The shelf is coated with a non-skid rubber carpet that maintains any size trays and cardboard boxes. The area is smooth and without a rim: the item is taken by sliding, no need to lift to go over a rim. The bottom rim is rounded which avoids any scrapping when it is taken.

Shelf	L0004	L0289
		
Characteristics		
Area	Non-skid rubber carpet	Smooth galvanised sheet
Width tray	mm	395
Length tray	mm	585
Total Thickness	mm	15
Weight	kg	4
		3,2
Use Conditions		
Maximum Load for a shelf	kg	20
		20



The fixation (**L0687**) reduces jump and the noise, caused by slamming between the shelf and the Rollis Wagon rack on slightly rough floors.



Ref	L0348	L0285	L0347	L0603	L0516
Size	A5	A4	Kanban Card	Label above the wagon	Stand

The PEHD document holders make it easy to identify the Rollis Wagons contents. They are easily clipped on the side of the Rollis Wagon.



Heightened Rollis® Reconcile Ergonomics and Productivity

Ergonomics and Productivity are complementary: without ergonomics, productivity leads to bodily deterioration (TMS) and without productivity, ergonomic improvements are bypassed. With a heightened Rollis, the operator is able to work within the ergonomic window and avoid any tray lifting as the material remain on the Rollis.

- Work at ergonomic height
- Store several boxes
- Mobile workstation organized with the evacuation of empty containers on the same Rollis
- Distribution of parts by the small train



Ergonomic Position for shelving books

Fnac



Boxes supply in square pitches; the operator does not need to bend down

SagemCom




Hold in the ergonomic window on a heightened Rollis

Brandt

Heightened Rollis®		L0337	L0045	L0192	L0111	L0358	L0297
			Pony (smallest)	Giraffe (highest)	Pony (smallest)	Giraffe (highest)	Picking Giraffe
Ballast		There is			There is	There is	There is
Width x Length	mm	400 x 400	400 x 615	400 x 615	400 x 600	400 x 600	400 x 800
Empty Rollis Height	mm	477	477	640	477	640	1040
Stability Ballast	kg	15	-	-	19	19	10
Useful Bottom Storage Height	mm	-	290	460	315	480	460
Maximal Load	kg	40	30	20	40	40	30
Weight	kg	23	12	13	27	28	26
Packaging by		2	3	2	3	2	1

Heightened Rollis with ballast enables to transport heavy loads while reducing risks of tipping

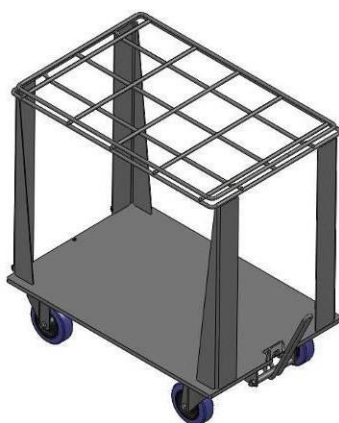

Ballasted Heightened Rollis



Ballasted heightened Rollis for copper circuit breaker poles L0111

Schneider Electric



Ballasted Heightened Rollis "Giraffe" (highest) for paper reels L0358

CDO

Flat pieces transport





Benhur Rollis®

Take the large flat pieces at man height



Same Deutz Fahr

Flat pieces held vertically take up less space



Carrier

Spacers allows to fit any thickness and shape



Zumtobel

The rubberized carpet absorbs shocks while carrying fragile pieces

- Multipurpose: it is adapted to any shape (Width, Length)
- Especially designed for flat pieces
- Ballasted to allow vertical carrying in 400 mm Wide
- Ergonomic taking at man height
- Pieces blocked by adjustable dividers

Benhur Rollis®		L0099	L0100	L0030	L0101	L0336
Width	mm			400		
Free Inner Width	mm			360		
Outside Length	mm	600	800	1 000	1 200	1 400
Free Inner Length with Dividers	mm	550	750	950	1 150	1 350
Height	mm	1298	1298	1298	1298	1298
Weight	kg	30	40	50	60	70
Maximal Load	kg	180	180	180	180	180

Labadis studies stability depending on the dimensions of your pieces and also, according to the small trains path and speed.



Benhur Dividers

Dividers hold pieces. They are put into the racks with an interval of 20 mm.



Dividers protect the paint of pieces against shocks




Kit of various size pieces



The divider holds the pieces ; it is inserted in anumbered rack

Characteristics		L0104	L0291	L0292	L0304	L0131	L0136	L0137	L0145	L0138	L0197
		Blocker	Spacer								Cutting separator
Compartment Number		1	1	2	3	4	6	8	10	12	
Free Space for Piece	mm	-	350	172,5	113	83	54	39	30,5	24,5	
Weight	kg	0,06	0,07	0,11	0,11	0,11	0,12	0,12	0,13	0,13	0,57

The revolving spacer and blocker (**L0281**) are held and fixed in a rack, thanks to a stainless-steel rod.

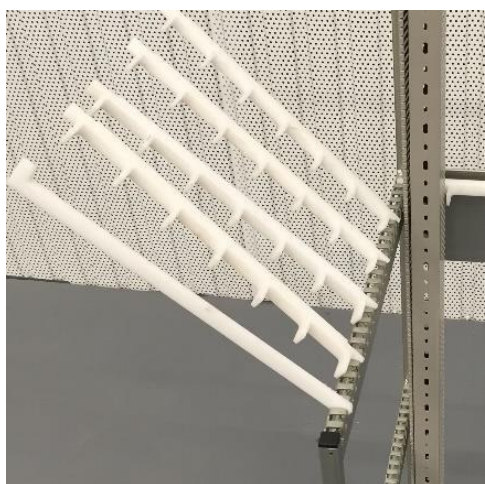

Dividers fixed on the left side



Stainless steel rod (**L0069**) inserted in the rack and through the dividers



The operator « closes » the compartments as he fills the Benhur Rollis

*Labadis studies and designs the dividers depending on the piece you have to package (**LC0016**).*

[Contact us](#)



Transatlantic Rollis®

Ease the long pieces handling in small driveway

New

Long and heavy pieces such as beams, motor shafts, cylinders require a flat transport to prevent accidents and easy taking. However, with the Transatlantic Rollis, their transport in the workshop remains fluid through 400 mm wide.



Haulotte

Girders stored on assembly lines



Haulotte

Ergonomic handle for manual manipulation



Labadis

2 400 mm Transatlantic Rollis used as a shuttle for metal sheet transportation

- Ergonomic handle
- Hole network to fix any type of structure
- A5 card holder and Kanban

Transatlantic Rollis®		L0246
Width	mm	400
Outside Length	mm	from 1 200 to 3 000 (multiple of 200)
Handle Height from the ground	mm	900
Maximal Load	kg	180

Labadis studies dynamic behavior entirely according to the kind of piece transported

U Rollis®

Compact cardboard supply

- Cardboard picking in the ergonomic window
- Feed workstation efficiently while using minimum space
- Store cardboard the same way as other products
- Distribute cardboard with the supply train
- Protect cardboard and avoid waste
- Delivered directly by truck from the supplier reduces the excess packaging
- Multipurpose for Galia cardboard, C09 to 14, or pallet lids folded in two
- To ensure the larger boxes stability, those longer than 1 000 mm are ballasted

Nouveau



Cardboard picking is direct and systematic



Cardboard storage with Rollis : compact and visually clear



Rollis U ballasted for large-size cardboard


Rollis® U		L0043	L0308	L0594	L0300	L0329	L0543D	L0544D	L0545D
		Sheet Metal		Ballasted					
Width	mm	400							
Length		600	800	800	1 000	1 200	1 600	2 000	2 400
Height	mm	800		1 144			1 480		
Useful Height	mm	650		1 000			1 335		
Useful Inner Width	mm	392		360					
Useful Inner Length	mm	592	794	780	980	1 180	1 580	1 980	2 380
Weight	kg	28	35	39	46	55	76	91	100
Maximal Load	kg	100		180					

Hotdog Rollis®

Packaging for pieces is made with flat cardboard boxes. Cardboard machines are usually equipped with heightened conveyors manually loaded. To suppress the tedious and painful process, Labadis has developed a concept including machines and Rollis that enables to have a keep on going feeding in cardboard without manual handling. The machine takes the cardboard boxes at a constant height; forks move into the Rollis and raise the cardboard pile. A reserve allows to have an automatic switch to the next Rollis. Rollis are directly carried by [truck](#). The cardboard is held in the center by two stems: no more waste.



Rollis moving automatically into a forming machine

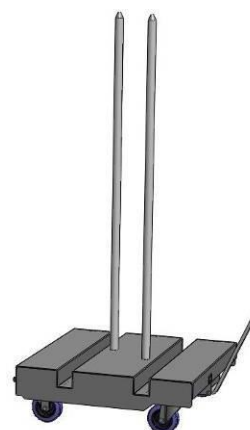

Hotdog Rollis L0133

Cylinders transport


















Rollis® for cylindrical pieces

Cylindrical pieces are classified according to the Length / Diameter ratio. So, 3 types are defined:

- Rod
- Bobbin
- Disc

The below table shows the Rollis solutions for each type of shapes and applications:

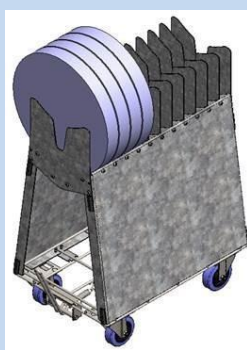Container and Rollis Type	Axle Position		
	Vertical 	Horizontal Low 	Horizontal Heightened 
Cylinder Length / diameter  Rod L/d ~10	 Benhur Rollis	 Long container Onto a Rollis	 Container onto a Heightened Rollis
 Bobbin L/d ~1	 Rollis	 V Bobbin Rollis	 M Bobbin Rollis
 Disc L/d ~0,1	 Tower Rollis	 U Bobbin Rollis	 U Rollis heightened with adjustable dividers to Wafers Width

For more precision regarding your application, [contact us](#)

V Bobbin Rollis®

V Bobbin Rollis allows to accommodate coils with various diameters. They are placed on two angles fixed on the Rollis. Carrying one at a time makes it possible to hang over the coil in front of the machine or the reel.

Characteristics		L0149	L0150	L0157
Width	mm		400	
Length	mm	400	600	800
Spacing Angles	mm	205	225	270
Weight	kg	7	7	11
Maximal Load	kg	180	180	180



Schneider Electric

M Bobbin Rollis®

Heightened system allows the operator to manipulate the coil ergonomically, without bending down. An axle can be inserted.

Characteristics		L0158	L0160	L0191
Width	mm	400		600
Length	mm	600	800	800
Weight	kg	22	25	34
Maximal Load	kg	120	120	120




Danone

Support axle inserted at man height

U Bobbin Rollis®

U Bobbin Rollis holds little thin coils.

Characteristics		L0151
Width	mm	400
Length	mm	600
Compartments		4
Weight	kg	28
Maximal Load	kg	180






Danone

U Bobbin Rollis allows to receive several coils thanks to compartments



Rollis® for cable and filiform parts

The filiform parts (cables, electric beam) are tricky pieces to handle. By suspending them, we get a good stability and a good catch. The rack frame is hung on the Rollis Wagon (p.6) at the required height and the number of brackets may change according to needs.

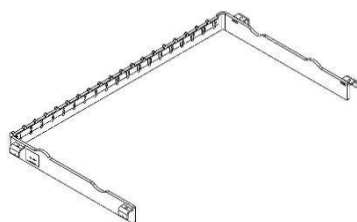

New

Frame Rack		L0177
Useful Inner Length	mm	598
Number of Notches		19
Maximum Load	kg	90
Interval between 2 Notches	mm	31

Brackets		L0178	L0341
Covering		Steel	Plasticized
Useful Carrying Length	mm	375	
Square tube	mm	20 X 20	
Maximum Distributed Load	kg	15	

Rollis Wagon Cross		L0533
Useful Carrying Length	mm	640
Width	mm	45
Weight	kg	1,2
Maximum Load for 2 laying coils	kg	40



Rollis Wagon equipped with 3 levels of frame racks and brackets




Fan and its motor



Adjustable stop L0443 for Brackets



Crosses for laying coils

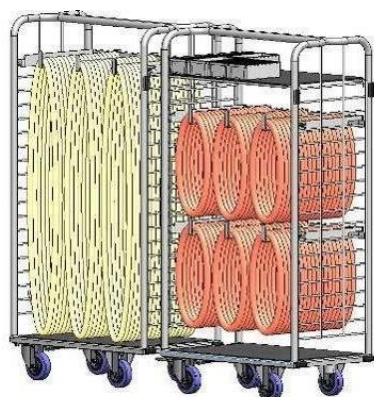

Combination with shelves, frame racks and brackets



Hydraulic piping

Same Deutz Fahr



Aluminium frames

Zumtobel

Bulky pieces transport





Bibliotek Rollis®

Non-linear pieces are more difficult to condition. The inclined shelves and the galvanized steel sides of the Bibliotek Rollis allows the storage of these pieces.




Rollis 400 x 800 with raw sides



Rollis 400 x 800

- Modular shelves (can be unscrewed)
- Numbering graduation
- Left side access (right is also possible)
- Shelves: metal (standard); or wooden (optional); or flexible (optional)
- Kanban card holder
- Optional A5 document holder
- Ballast is integrated to stabilize the offset of the pieces and the structure asymmetry
- Inside protection for fragile pieces (*optional: example AKILUX*)

Bibliotek Rollis®			
Width	mm	400	600
Length	mm	800	1000
Useful Inner Width	mm	387	587
Useful Inner Length		784	984
Setting Interval	mm	50	
Height shelf first position	mm	195	
Maximum Weight on a Shelf	kg	30	
Maximum Weight on the Rollis	kg	120	

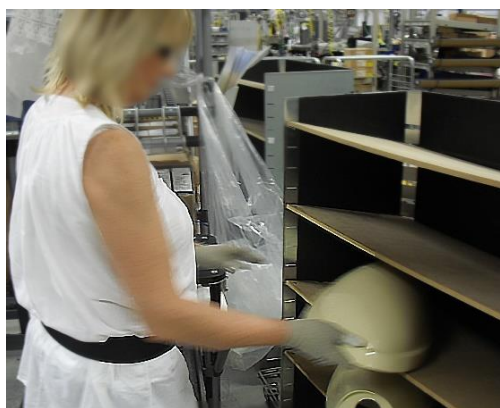

Akilux protection on the side protects pieces put on the shelves



Numbered graduation guides the position of the shelves

Box Rollis®

Box Rollis is for bulky light pieces and which do not need individual compartment.

New



Box Rollis®		L0633	L0473
Characteristics			
Width	mm	400	400
Length	mm	600	800
Height	mm	800	800
Interior Height	Mm	800	800
Weight	kg	23.5	29.3
Maximal Load	kg	120	120

Compartment Rollis®

Compartment Rollis is for pieces:

- Light and not very fragile
- Long pieces
- Isolated individually

The Compartment Rollis wall enables to protect the pieces inside. The handling of the pieces remains in the ergonomic window because they are arranged vertically and therefore it avoids the operator from bending down. On the other hand, in case of heavy pieces, the [Benhur Rollis](#) is recommended.



3 Compartment Rollis (L0167)




Complex shape supply

Compartment Rollis®		L0167	L0110
Characteristics			
Height	mm	800	800
Width	mm	400	400
Length	mm	600	600
Compartment Number		3	On request
Maximal Load	kg	100	100
Material			
Outside Wall		Galvanized steel	Galvanized steel
Compartment		White PVC	White PVC

Cosy Rollis®

Cosy Rollis enables to package delicate and complex shaped pieces, and make it easy to hold.

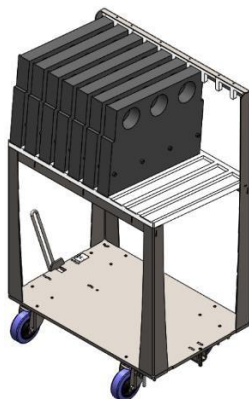

Track & Slide Cosy Rollis trolley (p.28)



Cosy Rollis for airplane reactor blades

Designed on request, [contact us](#)

Granules & liquids transport





Retention Rollis® (ISO 14000)

Protect the environment without obstructing your plant

Dangerous liquids need particular precautions to avoid water and soil pollution. The Retention Rollis system retains the liquid within the Rollis during all its use from delivery to recycling of the container, but also during storage and transfers within the plant.

- Ergonomically low introduction of the cannula, without any risk of splattering to the face
- Barrel tilting for complete emptying
- Whole volume retention of the barrel
- Rollis system allows to deliver the barrel with the supply train
- No more dedicated storage cupboard (investment costs are lower)
- No more risk of perforation by fork-lift trucks



Introduction of the cannula, without risks of splattering



The system allows to tilt the barrel for complete emptying



Loading with crowbar by hoist or forklift truck

Retention Rollis®		L0186	L0034	L0039
Maximum Barrel Capacity	L	30	60	235
Width x Length	mm	400 x 400	400 x 600	600 x 800
Overall Height	mm	430	550	680
Weight	kg	19	30	49
Maximal Load	kg	180	180	220

Retention Rollis enables to avoid expensive infrastructures such as diamond floor or cupboards with shelves. With [flat storage](#) of the Retention Rollis, you have access to each one immediately. Stock can be controlled visually; risk management is reliable.



Dangerous products Storage

Sogefi



Hopper Rollis®

This Rollis was developed for the plastic industry which uses a wide range of grain references. It enables to:

- Reduce the space at the foot of the machine
- Transport and distribute raw material more easily (small train)
- Execute an ergonomic and quick cannula connection
- Allow to empty the cannula inside the hopper (no grain on the floor)
- Keep sealing tank thanks to hinged lid
- Possible automatic changing of containers with a linear transfer



The small size Rollis enables to put several grades right on the injection molding machine



Introduction of the cannula at man height



Dust tight closures



Hinged lid entirely covers the tank and protects the inside contents

Hopper Rollis®		L0035	L0430
Tank		Galvanized steel	Stainless steel
Capacity	L	185	185
Width x Length	mm	400 x 600	400 x 600
Height	mm	1 075	1 075
Weight	kg	35	36
Maximun Cannula Diameter	mm	75	75
Maximal Load	kg	180	180

Labadis gives advice on the different filling ways of the Hopper Rollis, from Big-Bag or Octabin.

Optional: crosses to disembowel bags directly into the hopper (2 x L0427)

Wastes transport





Waste Sorting Rollis® (ISO 14000)

Waste Sorting has become an economic stake. Its effectiveness depends on reliable sorting of rawmaterial waste, so it must be easy to use. Waste Sorting Rollis allows to:

- Put the container as near as possible to the operator: it is no longer necessary for him to move
- Improve cubic efficiency as the operator no longer throws but places the waste directly into the container (no more bulkiness effect)
- Collect waste with the supply train
- Empty the container easily thanks to a flush surface
- No sucker-type effect on waste bags



Filtrauto


The Waste Sorting Rollis is used at the workstation: no need to move



2/3 & 1/3



50/50

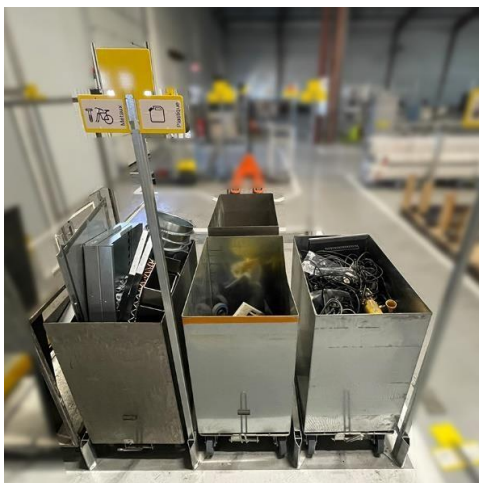

Garbage dump: the waste is recovered by the small train and stored by type before evacuation into the dumpster.



The small size allows to tidy up the cardboard; Increase by three the filling

Waste Sorting Rollis Bilk head LD2376

The bottom can be a wire or full base, depending on the types of waste which needs to be sorted. The trash bag falls on the edge of the waste sorting Rollis thanks to its wide perimeter.

Waste Sorting Rollis®		L0058	L0344
Material		Galvanized steel	Stainless steel
Width x Length	mm	400 x 600	400 x 600
Overall Height	mm	800	800
Weight	kg	21	40
Maximal Load	kg	100	100
Inside Volume	L	128	128
Bottom		Wire Rack	Waterproof

Trash Bag		L0471
Material		Plastic
Volume	L	157





Vidatris

Clear out waste neatly without leaving the workshop

Waste decrease involves the use of durable and reusable packaging. The [containers](#) and [Rollis trolleys](#) are switched between customer and supplier to form regular supply loops.

However, if waste remains, recycling requires sorting; the [Waste Sorting Rollis](#) stores any type of waste. This compact solution (400 x 600 mm) is collected by the small train and then emptied into the recycling bins.

The Vidatris allows to empty Waste Sorting Rollis trolleys into the dumpster without having to leave the building. It is a stainless-steel structure that goes through the wall on which it is installed.

The Vidatris allows:

- Keep Rollis wheels clean and not dirty inside the building
- Keep the building doors closed while evacuating the waste
- Keep the workshop dust-tight and keep the air conditioner on without heat loss
- Have a quick evacuation without any staff leaving the workshop

The Vidatris empties a Rollis in 60 seconds. The flow is regular and fast.

A touch screen manages the Vidatris activity.



The Rollis is inserted on the side of the Vidatris



The Vidatris goes through and allows to empty the waste in the container without leaving the building



Vidatris inside the building

Vidatris		L0275
Characteristics		
Length	mm	1 000
Width (from the wall)	mm	1 030
Height	mm	5 300
Outside Angle Winder	°	40
Maximum Lifting Weight	kg	120
Protection		IP 67
Structure		Stainless steel Aluminium
Running		
Power Supply	V	3 x 230
Engine Power	kW	1,5
Mechanical Cycle Time	s	25
Complete handling Cycle Time	s	60
Terms of use		
Compatible Trolley Size	mm	400 x 600
Maximum Rollis filling Height from the ground	mm	1190

Specific piece transport



Customized Rollis®

Standardize the flows with a customized Rollis adapted to special products

All businesses have pieces which are specific by their shape, fragility, size and weight. It is therefore interesting to have a multipurpose container adapted to different workstations in the firm.

Labadis takes care of all the conception of these built-in solutions according to the following steps:



1. Analysis of the workshops of the constraints and the diversity of pieces
2. Solutions search on the spot
3. Decision table according to the requirements

The following requirements are taken into account:

- Ergonomic pieces picking
- Pieces protection
- Support flexibility
- Vibration resistance
- Easy to use
- Storage space on the assembly line
- Stability
- Electric conductivity
- Interface with automatic machines
- Corrosion resistance

We use the most suitable materials (steel, stainless steel, wood, plastic, foam rubber, woven fabric, leather...)

Labadis designs Rollis solutions adapted to any need by studying the field constraints together. The solutions are always from the standardized bases Rollis system in order to guarantee the sharing flows.

New



Jundate Rollis for synchronous supply of kits



Rollis for quick change of injection tools






Rollis Bike for bicycle transport





Rollis® for cable and filiform parts

The filiform parts (cables, electric beam) are tricky pieces to handle. By suspending them, we get a good stability and a good catch. The rack frame is hung on the Rollis Wagon (p.6) at the required height and the number of brackets may change according to needs.

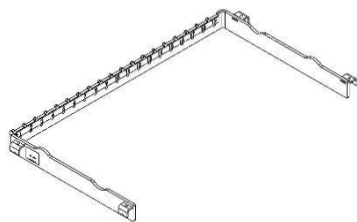

New

Frame Rack		L0177
Useful Inner Length	mm	598
Number of Notches		19
Maximum Load	kg	90
Interval between 2 Notches	mm	31

Brackets		L0178
Useful Carrying Length	mm	375
Square tube	mm	20 X 20
Maximum Distributed Load	kg	15

Rollis Wagon Cross		L0533
Useful Carrying Length	mm	640
Width	mm	45
Weight	kg	1,2
Maximum Load	kg	40

Also available with plastic-coat rod



Rollis Wagon equipped with 3 levels of frame racks and brackets




Fan and its motor



Adjustable stop L0443 for Brackets



Crosses for laying coils

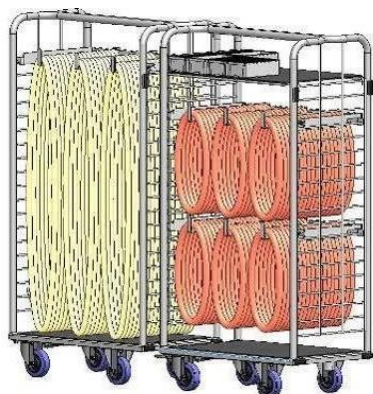

Combination with shelves, frame racks and brackets



Hydraulic piping



Aluminium frames

Same Deutz Fahr

Zumtobel



Bibliotek Rollis®

Non-linear pieces are more difficult to condition. The inclined shelves and the galvanized steel sides of the Bibliotek Rollis allows the storage of these pieces.




Rollis 400 x 800 with raw sides



Rollis 400 x 800

- Modular shelves (can be unscrewed)
- Numbering graduation
- Left side access (right is also possible)
- Shelves: metal (standard); or wooden (optional); or flexible (optional)
- Kanban card holder
- Optional A5 document holder
- Ballast is integrated to stabilize the offset of the pieces and the structure asymmetry
- Inside protection for fragile pieces (*optional; example AKILUX*)

Bibliotek Rollis®			
Width	mm	400	600
Length	mm	800	1000
Useful Inner Width	mm	387	587
Useful Inner Length		784	984
Setting Interval	mm	50	
Height shelf first position	mm	195	
Maximum Weight on a Shelf	kg	30	
Maximum Weight on the Rollis	kg	120	

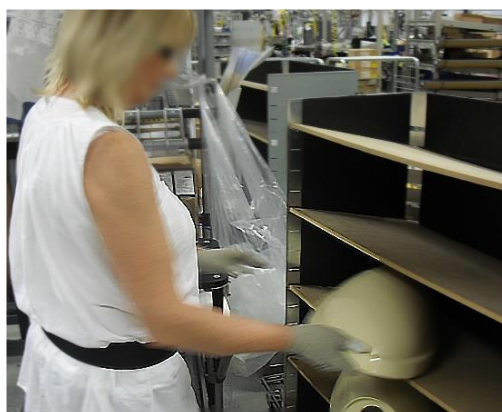

Akilux protection on the side protects pieces put on the shelves

Thorn



Numbered graduation guides the position of the shelves



Track & Slide System on Rollis®

Combine Rollis used at the workstation and by train

New


Some tight set ups require handling the trolleys sideways (like a crab).

It is the case for:

- The wide coils loading transported lengthwise and then loaded widthway
- The long pieces supply at the border line moved in the width direction
- The heavy pieces supply that are sideways setting up to reduce loading distance
- The warehouse picking where the shelf is placed in self-front and then by train for carrying

Labadis has developed the Track & Slide wheel which allows to move a trolley in the transport direction (Track) and on its side (Slide).

The transition from the Track to the Slide mode is done by moving the trolley back of 50 mm, slightly at a slant; no walkout is required. The transition in the other way is automatic without any intervention.

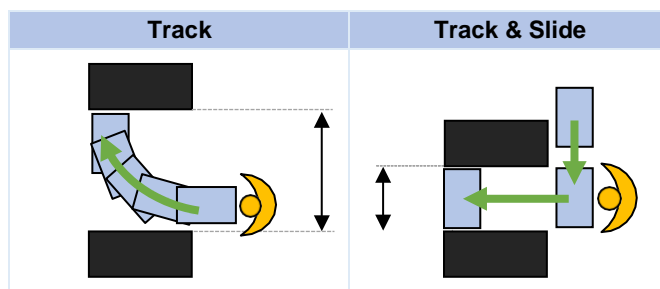


Small train transport
Track



Moving from side for kitting
Slide



Lateral coil loading on a holder

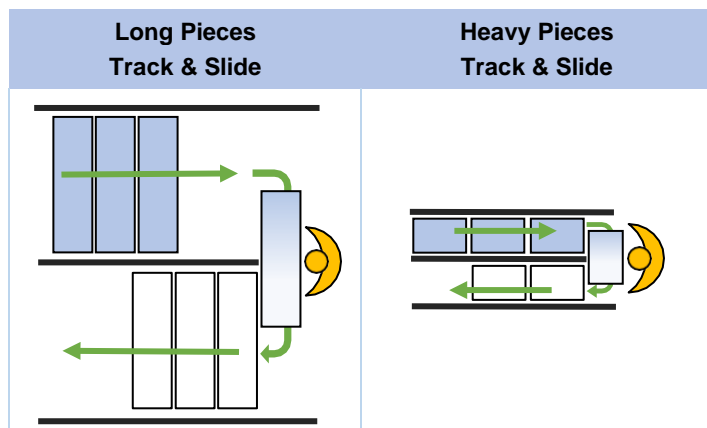

Containers



Plastic containers

Transform flows in a 400 mm wide passageway

The range of containers has been designed to offer a height and length coherent choice while always keeping in the 400 mm wide handling concept. The double tag holder (paper or Kanban) molded in the material for a quick removal and easy to automate:

- 210 mm wide tag (Galia, VDA, Odette...) with introduction guide
- Kanban tag holder, credit card size, which can be inserted and taken out by hand
- Container made from only one material allows a longer durability (tag holders molded from the block)
- Full rigid container for an overall protection of the products
- Closed handles which enables gripping without any risk of self-cutting by the pieces inside
- Easy to clean because no water retention areas, simple ribs, no metal pieces
- Anti-static ESD containers are available (on request)



210 mm wide tag holder : 160 g / m²...



...Kanban tag holder, credit card size



400 x 300 container: Storage identification on any side



The Kanban card is housed in notches molded from the block; Easy to grip and without hesitation thanks to its inclination

Small pieces can be put in small width mini-containers allowing to grasp pieces without damaging the operators' fingers.

Code	L0112	L0610	L0611	L0627
Designation	« Butter » box	« Spaghetti » box	« Leek » box	« Fish » box
<div>New</div>				
	Outside Length	176	355	555
	Outside Width	93	92	88
	ESD	L0612	Available	Available
	Cover L0563	Yes	No	No
Quantity in the container : 6407 Ref L0118	12	6	4	2
				



Butter Box cover L0563



Dura Automotive

Workstation supply in mini-containers and containers



Labadis

The mini-containers ergonomic width allows to grip the contents without any finger constraints



Packaging container

Raw Material	Polypropylene – Food Compatible
Temperature of use range	°C -20 à + 80
Color	Grey Similar color: Pantone 430 C - RAL 7001

Réf	Code	L x l	h	L x l	h	Volume	Weight	Maxi Load/ Container	Stacking Interval	Container / Rollis®	Overall Height	Quantity / Cardboard	Qty / Pallet
		Outside Size		Inside Size									
		mm	mm	mm	mm	Liter	kg	kg	mm				
L0112	2106	176 x 93	59	167 x 84	57	0,7	0,1	1,25	-	204	-	60	1200
L0610	3106	355 x 92	57	351 x 83	55	2	0,83	15	-	102	-	18	-
L0611	5106	555 x 88	57	550 x 80	55	3	1,13	15	-	68	-	12	-
L0627	6206	555 x 177	57	550 x 168	55	5	1,65	15	-	34	-	6	-
L0113	3212	300 x 200	120	255 x 155	107	4	0,37	15	110,0	40	1 256	-	272
L0114	4307 ¹	400 x 300	75	356 x 256	62	6	0,60	15	65	34	1 261	-	136
L0115	4312	400 x 300	120	356 x 256	107	10	0,75	15	110,0	20	1 256	-	80
L0116	4317	400 x 300	175	356 x 256	162	16	0,9	15	165,0	14	1 311	-	48
L0117	4323	400 x 300	235	356 x 256	222	20	1,1	15	222,5	10	1 269	-	80
L0118	6407	600 x 400	75	556 x 356	62	12	1,2	20	65,0	17	1 261	-	136
L0119	6412	600 x 400	120	556 x 356	107	21	1,3	20	110,0	10	1 256	-	84
L0120	6417	600 x 400	175	556 x 356	162	32	1,6	20	165,0	7	1 311	-	56
L0121	6423	600 x 400	235	556 x 356	222	45	1,9	20	222,5	5	1 269	-	40
L0053	6428 ³	600 x 400	280	541 x 358	260	50	2,7	20	264	4	1 206	-	32
L0122	6432	600 x 400	320	556 x 356	307	61	2,6	20	307,5	4	1 386 ²	-	28
L0123	6441	600 x 400	410	556 x 356	397	79	3,4	20	397,5	3	1 349	-	20
L0125	8420	800 x 400	200	756 x 356	188	51	2,7	20	190,0	6	1 296	-	33
L0126	10424	1 000 x 400	214	956 x 356	185	63	3,9	20	204,0	6	1 296	-	33

¹ No Kanban holder

² Height which does not enable transport on two-level trailer

³ Midnight blue color, bottom with holes, no Kanban holder

Plastic Lids

The plastic lid covers all sizes of containers (one 400 x 600, two 400 x 300 or four 200 x 300). The notches enable to attach the container onto a Rollis®. It makes piles on Rollis transportable by truck. This cover can be stacked: it is also possible to stack containers on top of the lid.



Cover on 2 containers 400 x 300



Lid with straps

Lid		L0124
Length	mm	598
Width	mm	397
Height	mm	26
Weight	kg	0,8
Qty / cardboard		20

⁴Our products are often improved, their characteristics can be changes without warning.

Small train logistic



Towing Hook

Make flows transportable by anybody

With the Towing Hook, anybody can pull a Rollis® train:

- Maintains hook on the coupling
- Instant freeing from the coupling in case of an emergency stop
- The round handle reduces pulling effort
- Yellow nozzle for better localization




Rollis train pulled by hand with the Towing Hook



Ergonomic handle

Towing Hook		L0005
Length	mm	990
Weight	kg	0,45
Material		Stainless steel

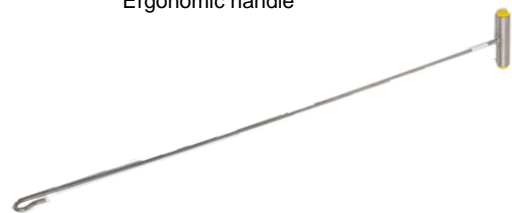

Stainless steel Towing Hook

Box Locker for 400 x 300 containers

The stainless-steel Box Locker allows to hold 2 piles of 400 x 300 containers on a Rollis, therefore avoiding any risk of fall whilst the trolley is moving. It can be stored on the Ergomover desk.



Box Locker holding 2 piles of 400 x 300 containers on a Rollis



Box Locker stored onto the Ergomovers Towing Truck desk

Sold by 8

Stainless steel Box Locker		L0074
Length	mm	150
Outdoor Width	mm	45
Outdoor Height	mm	60
Material		Stainless steel
Weight	kg	0,195

Ergomover Towing Truck

Change supplying of your product lines in a regular activity


The « Ergomover » Towing Truck is especially designed for frequent Rollis® or Rollis® Wagon handling fitted out with the telescopic coupling (patent) on smooth, flat and covered floor.

The driver's platform, which is only 65 mm above the floor, is clear of any obstacles and allows the driver to step in and out without any trouble. This enables frequent stops particularly necessary to deliver pieces on production lines in case of the small train (Mizusumashi).

The stand-up position with abdominal support guarantees safety in case of head-on bumps (the driver is not thrown to the front). This position gives a surrounding overview and enables the appropriate driving at junctions.



Reduced width: 600 mm
Quick and easy access

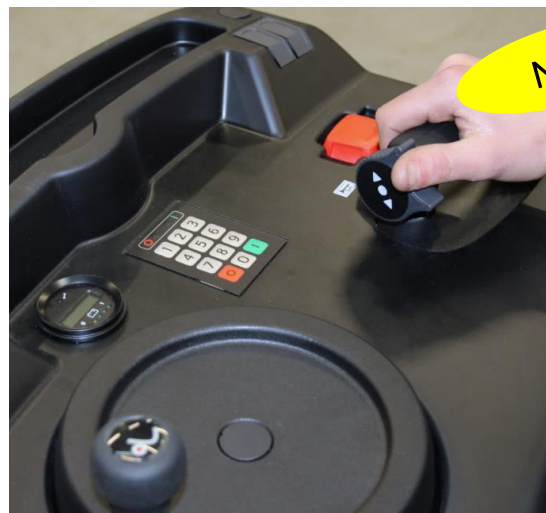

Accelerator at the driving table,
to keep feet stable on the machine

The Ergomover is 600 mm wide. Combined with Rollis use, it allows to reduce the aisles. The Ergomover is equipped with all functions to pull, couple and stop the Rollis.

The 400 mm wide charging table, and gel maintenance-free battery allows the charging station and battery change to be anywhere on the Towing Truck path; it is no longer necessary for the driver to change his path. The battery changing takes only 20 seconds, without the need of any lifting equipment. The supplying of lines or the collecting of products becomes a regular job that can be easily controlled.



20 seconds to change batteries



Rollis Length		Aisle Width for a U turn
mm		mm
600		1 800
800		2 000
1 000		2 200

Ergomover Towing Truck 720TT		L0008
Towing		
Towing Power for a maximum of 1 minute	N	1 400
Towing Power for a maximum of 5 minutes	N	1 050
Towing Power for a maximum of 60 minutes	N	700
Maximum Speed (configurable, delivered at 5 km/h)	km/h	8
Engine		
Used Voltage	V	24
Engine Power	W	1 500
Maximum Noise Level	dB(A)	70
Maximum Vibrations	m.s ⁻²	1,5
Electronic Variation		Continue
Braking		Electric
Emergency Braking		Electro-mechanical
Dimensions		
Weight with Batteries	kg	250
Total Length	mm	1 500
Total Width	mm	585
Total Height	mm	1 300
Access Step	mm	65
Ground Clearance	mm	33
Wheelbase	mm	815
Diameter and Width of the Driving Wheel	mm	250 x 80
Maximum Load on the Front Wheel with Driver	kg	150
Diameter and Width of the Back Wheel	mm	200 x 50
Maximum Load on the Back Wheel with Driver	kg	68
Changing and Charging Table for Battery		
Dimensions (Width x Length)	mm	440 x 1 090
Height	mm	960
Charging Voltage	V (AC)	All Voltage
Charging Power	W	2 000
Changing Cassette for battery		
Batteries per cassette		2
Voltage	V (DC)	24
Total Charge per Cassette (so 2 batteries)	Ah	152
Weight	kg	63
Charging Time	h	8
Number of Charging Cycles		700

Includes:

- 1 Towing Truck with 1 battery
- 1 additional battery
- 1 Table for battery changing
- 1 multi tension charger with an European plug
- 1 Traction Arch for Rollis



Possibility to adapt a desk to store the [Kanban cards](#)



Training for Ergomover driving (LC0014)

Traction Arch


Reconvert your towing equipment safely

If you already have a tugger, you can transform it into a Rollis® Towing Truck by fixing a Traction Arch on its back.

The Traction Arch is equipped with:

- An anti-tilt pole with profiled rubber seal which absorbs shocks and reduces noise
- Pre-drilled holes for screwing the Traction Arch on most machines
- A steel plate which can be drilled to fit

Traction Arch		L0063
Length	mm	340
Width	mm	240
Height (not assembled)	mm	1223
Weight	kg	16
Material		Galvanized Steel

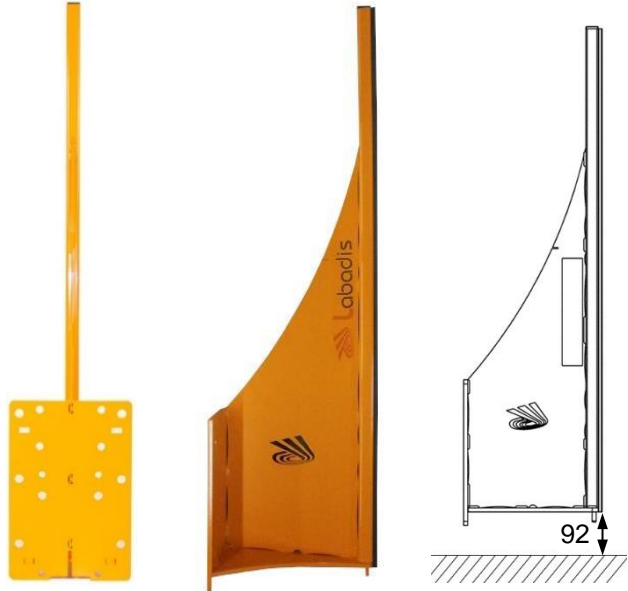

Rollis® Train with Ergomover Towing Truck and its Traction Arch

Without a suitable Traction Arch for the Rollis® System, the equipment may get damaged.



Telescopic Coupling twisted by standstill hook on a machine

Line side delivery and workstations



Rollis® Table

Keep your hands free with a mobile station always available

It is sometimes necessary to move while holding small items or a flat surface is needed to write on. For example, when it is necessary to interrupt a line, the reflex is to put these objects any other objects that comes to hand or on the floor. Objects may be forgotten or may interfere with the train or another operator.

The Rollis Table allows the operator to have a mobile workstation:

- compact
- ergonomic with hand height table
- accessible on both sides
- easy to move thanks to the integrated handle
- equipped with the telescopic coupling system: it can be added to the little train
- convenient to store: small tools in the drawer
- autonomous with equipment access as a Rollis

A slide in tray, accessible on both sides, can be subdivided thanks to [mini-boxes](#).

The integrated ballast on the base enables to be used at the head of the train.



2ADIS


The Rollis table allows to work close to the workstation



Decathlon

The operator keeps free area by storing tools in a drawer under the table

Rollis® Table		L0565	L0565C	L0474	L0474C
Drawer Container 600 x 400 x 70		0	0	1	1
Width	mm	400	400	400	400
Length	mm	620	620	620	620
Total Height	mm	920	920	924	924
Inner Length	mm	610	610	610	610
Inner Total Height	mm	760	760	760	760
Drawer Height	mm	-	-	185	185
Table Thickness	mm	8	9.5	8	9.5
Table Material		Compact Laminate	Galvanized steel	Compact Laminate	Galvanized steel
Maximal Load on the Table	kg	20	20	20	20
Ballast	kg	5	5	5	5
Weight	kg	23	25	25.5	28

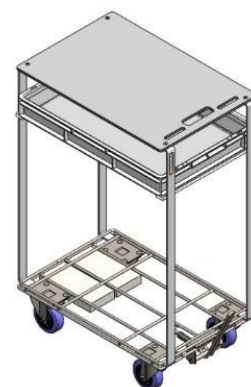

L0474



Dynamic Rack

Make front-feeding ergonomic and productive at the workstation

On an assembling line, the operator must be able to pick up the maximum of pieces with a minimum of movements. To reach this result, the packaging should be as narrow as possible (in containers or in Rollis®). The guiding system at the workstation should enable to display as many containers as possible.

Labadis has developed a compact dynamic rack system which only requires 48 mm between 2 layers (see the diagram on next page). The offset of the layers enables to display up to 7 levels of pieces in the ergonomic window and to have 62 references per meter in the line side delivery.

The assembling usually consists of one main large-sized piece, of smaller-sized connecting pieces and screws. These pieces arrive at the station either in [Rollis](#), in [containers](#) or in [mini-containers](#). The dynamic Rack allows to mix different types of packaging. Supply at the station is done by Rollis or by Rack; the operator does not need to move anymore.

The width pitch between the Racks and Rollis is 450 mm. The border line reorganization can be done by the operators themselves.



Ergonomic pieces handling thanks to the offset of the layers in organ keyboard



32 different pieces in 2 x 450 mm wide



Ergonomic design: the operator can be as close as possible to the pieces




Mixed assembling line edge :
Rollis and containers in Racks




Each Rack is modulated according to the type of packaging. The piece handling is compact and limits the movement of the operator


Optional :




Cylindrical pieces layer



Reel layer with peeling, straight
label handling




Blocked




Released

Return Layer for finished product equipped with a level (L0400), which is blocked the container on the top of the layer and then set him free

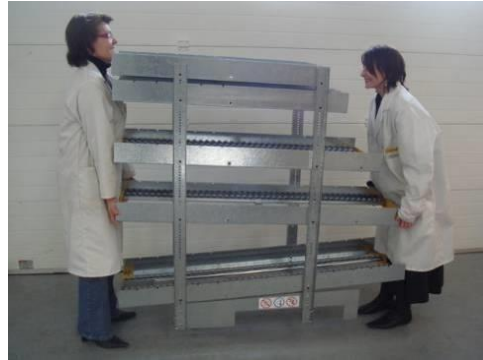


The self-carrying structure enables to move the Rack by hand in the consumption place on the assembling line

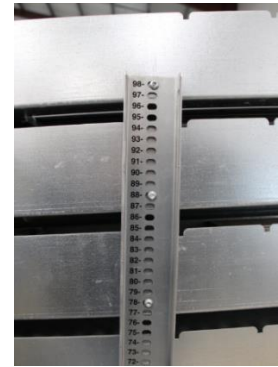


The layers are easily adjustable in height thanks to the graduation on the uprights



Empty container returned by guiding:
no more stuck or dropped containers

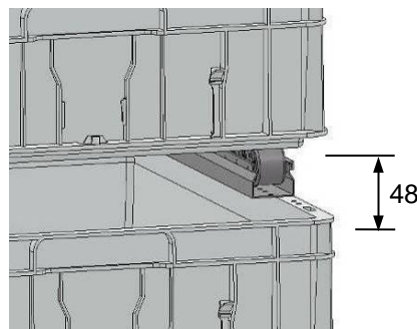

Structure limits a minimum space of 48 mm wide the space between 2 containers and increases the storage capacity (a maximum of 60 mm for the upper pitch)

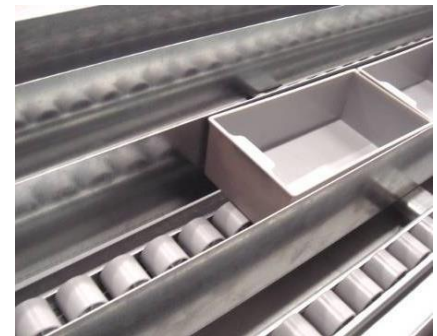

Each container row is guided at 100%:
No more midway blocking

- Picking up pieces easily in the ergonomic window by uncovered containers
- Container Guidance on the whole length: no more stuck container
- Guided lane return of each type of containers: no jammed containers on the floor
- A 450 mm wide pitch which allows to mix the supply in containers or in Rollis
- 100 references per meter of storage linear with butter box
- Wheel with metallic axles close together for a regular and reliable slide
- Height adjustment done by the outside (no nuts or other fixations in the inside)
- Rack can be moved manually or with a forklift
- A support bar at the beginning of each lane protects the wheels while loading the container
- Tag holder to identify each lane
- Possibility to fix front-systems to help choose right pieces (picking to light)
- Height adjustment with an Allen key
- Equipment delivered assembled, ready to use

Dynamic Rack			
Number of poles		2	3
Width Pitch (distance between 2 storage lines)	mm	450	
Unit Width	mm	460	
Loading Maximum Height	mm	1 350	
Largest Layer Length	mm	1300 1700	2100 2500
Height Pitch	mm	10	
Interval Pitch between levels to have access to pieces	mm	99	
Maximum Load per layer	kg	200	
Maximum number of layers for picking		7	
Maximum Load	kg	700	1 300

Mix Rack Rollis and Box

Densify your line side delivery

The more compact a front line is, the more efficient it is. The supply of Rollis trolleys contributes to this compactness, but when it is low in height (heavy parts) we can use the free space at the top to put parts in containers.

Gathering together the parts that form a sub-assembly makes the assembly sequence more obvious.

A dedicated row for the return of empty containers and trolleys can be put in common with several supplies.

- Space saving by using the space above the Rollis
- Gathers together small, medium and large pieces in a common sub-assembly
- The layers are adjustable in height every 10 mm

Mix Rack		L0638	L0639	L0640	L0641
Width Pitch (distance between 2 storage lines)	mm	450			
Unit Width	mm	460			
Loading Maximum Height	mm	1 350			
Largest Layer Length	mm	1300	1700	2100	2500
Height Pitch	mm	10			
Maximum Load per layer	kg	200			





Pile Lifter

Supply heavy and frequently used pieces in an ergonomic and profitable way

The supply of heavy or frequently used pieces is often a problem due to ergonomics and handling costs. The Labadis Pile Lifter cancels the handling of containers. A pile is directly brought to the work station and lifted at constant height.



Pieces taken at constant height



Switch of empty container onto the next pile

- Operator productivity: constant height handling (automatic upgrading)
- Supplier productivity and ergonomic: no more lifting of full containers
- Switch of empty container by easy translation (1 second)
- Changing of pile in 3 small operations (less than 3 x 3 seconds): low variability
- Used for filling and emptying containers
- Can be used on both sides (left and right)
- Floor saving: in most of cases, 2 piles of containers are enough for autonomy
- Manuel height setting for containers up to 320 mm
- Easy setting up: all electric and adjustable feet
- Unlock the line: one can walk through the Pile Lifter
- Safety: the Rollis® is locked whilst lifted (avoid falls if unbalanced)
- Soft start and stop by electronic dimmer



The return of empty container is outside of the line and does not make the operators path longer




The pile lifter decreases the supply area and clears the work station

The best lay out for a Pile Lifter is at the end of the manufacturing line, where it does not make the operators working distance longer.

The Pile Lifter can be used both ways thanks to a reversal and symmetrical design.



The Pile Lifter works with all container heights (maximum 320 mm high)
Height is adjusted manually with a screw

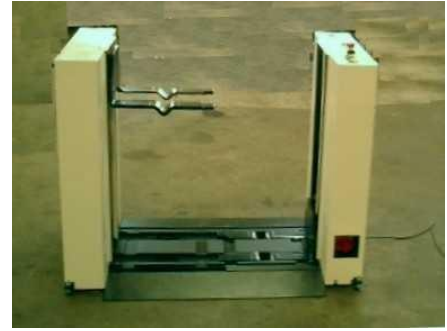

The Pile Lifter can be crossed, the operator can go to get the next Rollis®

Pile Lifter		L0056
Using Characteristics		
Lifted Forks Height	mm	735
Rollis Transfer Height (face to face Fork)	mm	390
Maximum Lifting Weight	kg	120
Rollis Width	mm	400
Rollis Length	mm	600 or 800
Minimum time between 2 containers change	s	8
Dimensions		
Overall Floor area required	mm	1 195 x 710
Overall Height required	mm	990
Total Weight	kg	195
Energy		
Tension		1 ~ 230 V 50 Hz
Maximum Useful Intensity	A	2,6
Maximum Power	W	600
Noise Level	dB A	< 70

The maximum picking height depends on the ergonomic height. The table below gives the number of containers per pile:

Nb container / pile	Container Height	75	120	175	235	320
Transfer of the first container by :	Sliding	11	7	5	4	3
	Lifting	12 – 13	8	6	5	4

Certified  Machine

Options:



2 crutches (L0184) to move the Pile Lifter



Platform for Rollis 400 x 800 (L0072)

Loading Frame

Load your heavy pieces with one hand

The loading of heavy parts is usually done with hoists. It forces the operator to direct his load while activating his remote control, which places a lot of strain on the lower back.

The Labadis loading frame combined with the Rollis allows a fixed-point grip for direct installation on the product.

- Compact equipment, 950 mm with product inlet / outlet
- 3 pre-recorded positions: pick up / transfer / put down
- A single way of handling: without constraint for the operator.
- Structure compatible with the Labadis line-side
- Integrated wiring
- Ground infrastructure
- Manual installation, without bucket lift or forklift
- Single-phase power supply



Frame		
Length	mm	On request
External width	mm	950
Max Weight	kg	60
Length of stroke	mm	570
Voltage		1 ~ 230 V 50 Hz
Maximum Power	W	~ 200

Rollis® Floor Positioner

The floor Positioner brings the Rollis to a complete standstill while allowing access to all of its sides:

- Fixed on the floor with 2 screws
- To avoid stumbling, the Rollis floor positioner must be installed in a logical and visible way
- Avoids using brakes on the wheels

Rollis® Floor Positioner		L0154	L0475
Length	mm	400	600
Width	mm	96	96
Height	mm	8	8
Weight	kg	0,36	0,6
Material		steel galvanized	galvanized



The operator works without sustaining the trolley



The Rollis floor positioner blocks the 2 front wheels



Rollis floor positioner bender L0456

Sold by 10 with 2 Positriv screws 5 x 50 and plugs 6 x 30

In / Out Kit in Square Pitch

To supply Rollis trolleys in an assembling line, we can use:

- Storage units (L0466) with Rollis floor stopper (L0154)
- In / Out Kit which allows to realize a Square Pitch with lateral translation on the front wheels


New



Square Pitch realized with 2 kits and 2 rails



In / Out Kit to supply a Pile Lifter

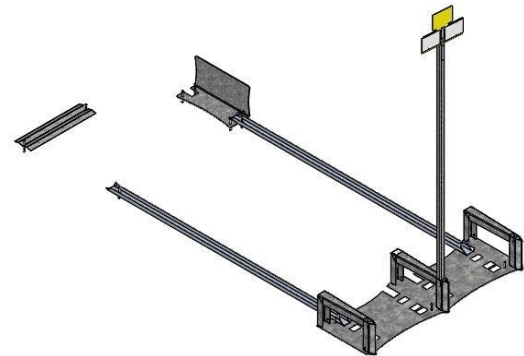

Square Pitch L0096

1 kit = 1 galvanized steel sheet 2 Ins + 1 stop (L0569) + 1 floor stopper + 2 aluminum rails + 1 pole and label holder + 10 screws and plugs + 2 labels

In / Out Kit in square Pitch		L0096
Galvanized Steel Sheet Length	mm	960
Width	mm	340
Height	mm	160
Weight	kg	7,2

Manual Assembling Line

Design lines quickly and to scale

An assembling activity breaks down into three steps:

1. Piece handling
2. Piece laying
3. Assembling (screwing, clipping, gluing, riveting...)

Labadis has developed a modular system which allows to design quickly each station by blending:

- Container supply on dynamic Rack
- Stacked supply on Rollis trolleys
- Pieces stand and tool holder



Bio Rad

The line alternates between station and supply with containers in Rack and stacked on Rollis



28 pieces are accessible in the operators handling area


All pieces are 450 mm wide, which enables to design a assembling line quickly. The balancing of the line is done with station transfers directly on the spot. The variants of assembling are added throughout the conception / realization. The organization work can be done on a spreadsheet as well as on the field.

The Labadis lines respect the following principles:

- Ergonomic: handling inside the ergonomic common window
- Productivity: U-line enables rotating operators
- Evidence: the line sequences picking of the pieces, the stand and the tooling in an intuitive way
- Multipurpose: Modular design allows to plan a new line quickly
- Flexibility: the compact components supply, either by containers or by Rollis trolleys, enables to have several versions of products at the station
- Compactness: Labadis Racks increase storage and reduce lines lengths
- Autonomy: touch pad use makes learning easy



Labadis technical floor includes all cable types: ground is free and view is cleared

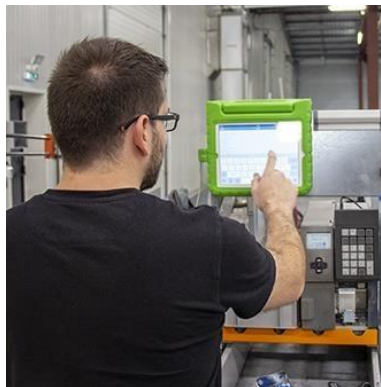

Straight access to plans and videos by Wifi on touch pad



The layer (L0547) with ballast (L0288) hosts fitting template and tools

Flat storage FIFO



Flat storage in dynamic Rack

Increase your supply train performance by optimizing the storage fronts

Small or low-runner products are economically stored into Dynamic Racks also called gravity shelves. The challenge is to present to the staff the maximum of references in a minimum of distance.



Less than 1 350 mm high is ergonomic height which enables to see the whole workshop



Storage racks can be configured as wished, according to the type of piece that needs to be stored



Rollis Skate (**LD0584**) is used to move the racks, with 4 revolving wheels for lateral movements

Labadis has developed a compact Dynamic Rack system which only has 48 mm high between 2 layers (see drawing below). Each Rack stands alone with a 440 mm wide interval, the same as the Rollis® one. Therefore, each layer is adjusted to the container height.

Whether it is for supplying feeding trains, preparing orders or kitting, the store man has the largest choice in front of him. The more efficient he is, the faster his response to the customer's demand is, the less delay and shortage the customers line are.

- High density of front containers thanks to a compact structure (100 references / storage meter in "butter" box)
- Ergonomic rear loading (maximum 1 350 mm high)
- No more container jammed in the middle of the rack thanks to an individual guide for each corridor
- Each layer can be individually adapted to minimize loss space
- Label holder for each corridor
- Accepts 600 x 400 / 400 x 300 / 300 x 200 mm containers and "butter" boxes
- Enables to replace a Rack by a Rollis® line thanks to their 450 mm wide common interval
- Reusable standard Rack structure for other projects

Dynamic Rack			
Number of poles		2	3
Width Pitch (distance between 2 storage lines)	mm	450	
Unit Width	mm	460	
Loading Maximum Height	mm	1 350	
Largest Layer Length	mm	800 1200	2400
Height Pitch	mm	10	
Interval Pitch between levels to have access to pieces	mm	99	
Maximum Load per layer	kg	200	
Maximum number of layers for storage		11	
Maximum Load	kg	700	1 300

The equipment is delivered assembled and ready for use.

To help you design your Racks, we have a conception form for your disposal.

Storage mixed Rack

Exploit the space above the Rollis with heavy weight

Rollis are limited at 180kg. When the pieces are very dense, the height of the Rollis may not exceed 300 mm. To make the upper space directly accessible, we can add storage layers. An 85 mm structure strut is placed under the superior layer.

- Space saving by using the space above the Rollis
- Modularity
- Re usable because of standard 400 mm useful width

Storage Mixed Rack		L0638	L0641
Width Pitch (distance between 2 storage lines)	mm	450	
Unit Width	mm	460	
Loading Maximum Height	mm	1 350	
Largest Layer Length	mm	1300	2500
Height Pitch	mm	10	
Maximum Load per layer	kg	200	



Flat Storage on Rollis®

Transform your storage into a management and service tool

Storage must allow the customer to pick up anything at anytime without waiting.

Storage with Rollis® of bulky or high runner pieces, enables to have, in only 400 mm wide, the whole stock of one reference. So the piece is always at the same place. No more searching in pallets and forklift trucks going up and down. Time for storing and retrieving is drastically reduced. FIFO (First In First Out) is automatically respected.

Stock shortage of a piece is visible by the user (customer), the supplier, as well as the stock manager. This results a better reactivity and supply shortage nearly cancelled. Flat storage reduces storage surface by optimized aisles.

Since the storage is horizontal, there is no more risk of goods falling from shelves.



The organization enables the FIFO respect



Storage on Rollis: 1 line per product

The storage units are supplied with poles with plastic repositionable and laser-printable labels that ensure the geographical identification of aisles and the location of references at the entrance. They can also receive a Kanban batch box on the exit side (**L0015**).

The poles [Batch Building Box](#) provide safety by materializing the entrance of the storage.

The sheets are perforated, which allows the wheels to be turned when a Rollis is reintegrated by the front of the flat storage.

The precise guiding of the Rollis trolleys by the units enables to insert the wheels into the rails without having to aim. We avoid entrance offsets (which happens when rails are alone).

The sheets are fixed by screws into the floor. It is advisable to use them on a smooth and flat surface.

Rails can be purchased raw or cut on request and ready to fix.



Rail cut to length on request, ready to fix: open ends to guide the wheels. 2 holes are chamfered so that the screw head does not exceed



Screw and plugs ready to fix
(drilling diameter 6 x 30)



Storage Unit (rail not included)

Labadis provides advice for sizing, setting up and rational management for flat storage on Rollis.

Calculation of the Number of storage units required:

A Storage Unit is composed of:

2 sheets + 6 Posidrive screws + 6 plugs ø 6 + 1 pole + 2 laser-printable labels

Number of Storage Units required = Number of storage lines + 1 (the first Storage Unit is used as priming)

Storage Unit		L0466	L0436	L0537	L0488
Characteristics		Standard		Reinforced	
Storage Sheet Width	mm	339			
Storage Sheet overall Length	mm	470			
Weight of Storage Sheet only	kg	2,6			
Floor Fixing Screw		Posidrive 5 x 40			
Reinforced		No			Yes
Storage Characteristics					
Storage Interval (distance between 2 storage lines)	mm	450			
Guide Height	mm	160			
Identification Pole (reference)		L0028			
Total Height from the Floor	mm	1 574	1775	1986	1775
Usefull Height under Label Holder	mm	1 398	1598	1810	1598
Weight of Pole only	kg	1,64	1.8	2	1.8
Labels Size	mm	105 x 74			



Nestlé

Stainless steel Storage Unit (L0084) in a zoning floor composed of tapes on the floor and plastic chains

Storage Rail Length Choice:

Storage Rail Length = Number of Rollis x (Rollis Length + 8 mm) – 404 mm

Example for the storage of 6 Rollis 600 long:

Rail Length = 6 x (600 + 8) – 404 = 3 248 mm


Storage Rail		L02xx	L0007	L0042
Length	mm	On Request	3 000	6 000
Tolerance on Length	mm	± 1	± 20	± 20
Ends		Opened Out	Raw	Raw
Holes		chamfered	-	-
Section	mm	40 x 20 x 2		
Material		Anodized Aluminum		
Weight	kg/m	0,41		
Screw	Posidrive 5x 40	2	-	-
Ankle	ø 6 mm	2	-	-



Holding brackets L0195 (per 4) for plastic chain L0360 on STAP pole

STAP setting up for 600 mm wide

Laying Template	L0085	L0062
Model		
For Storage Unit	L0466 (steel standard)	L0084 (stainless steel)

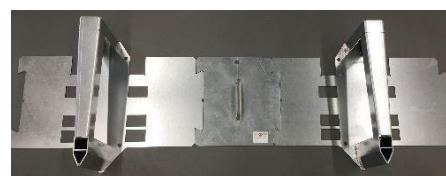


Laying template to position the sheets on the floor in 600 mm wide lines

Logistical loop



100% Rollis® Flow

Enjoy Rollis efficiency all along the supply chain

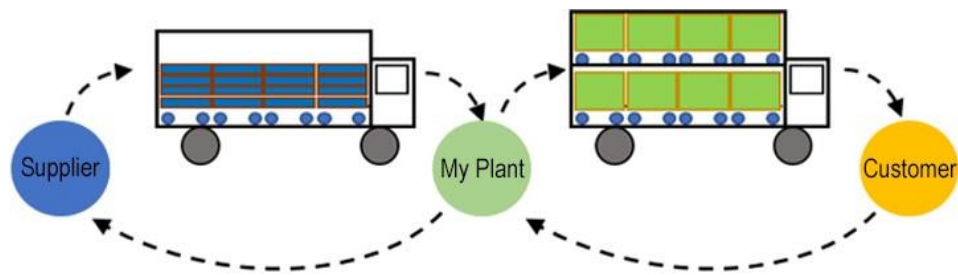

Customer and supplier share the same flow issues (productivity, ergonomics, space saving...). The flow in Rollis trolleys brings benefits all along the supply chain.

With Rollis® system, a 13.5 m truck is unloaded at dock in less than 10 minutes; all the lines of 22 Rollis are pulled out at once. The Rollis are directly put into the flat storage or unloaded into the dynamic racks. Receiving activity becomes a regular and productive.



Rollis blocked by the Rollis strap (L0605) fixed on the standard truck frame. Strap mount (L0628).



22 Rollis unloaded at once

Rollis trolleys transport

1 Level: A standard truck with smooth floor is suitable. No rail on the ground is need. The truck is loaded either:

1. With a [dock](#),
2. On flat area with a hatchback truck,
3. With a Rollis lift on forklift

A strap fixed on the truck frame blocks the Rollis.

2 Levels: For lightweight loads, we will try to fill the truck on all the available height (2,7 m high):

1. Truck with 2 floors: with Rollis unloading is done either by 2 different height docks, either by a lifting table or by the truck tailgate
2. Rollis pallet: allows to stack the Rollis
3. pallet of unpalletized containers, by box transfers on Rollis thanks to the [palletising hook](#). Labadis may develop a palletizer or unpalletizer (automatic machine for plastic or cardboard boxes)

Labadis helps you make the most appropriate choice according to your factory outline and those of the customer or supplier.



Unloading by tailgate



Truck with two floors



Transfer Hook

Transfer to Rollis® right from receiving

Upon receipt, container piles are directly transferred onto Rollis thanks to a Transfer Hook. Less than one minute is needed to transfer one pallet, cover included.

- Its special shape allows to take containers under the rib, even flat
- Precise grip, thanks to its round leather handle (good grip without effort and antiperspirant)



Manual transfert from pallet to Rollis®



Transfer Hook

Transfer Hook		L0014
Length	mm	490
Weight	kg	0,35
Material		Stainless Steel
Handle		Natural Leather

Rollis® Loading Dock

Stop the Dock Damage

New

Loading Docks are degraded quickly due to daily truck docking and forklift coming and going.

Labadis has developed a simple dock, reliable and economic. A loaded Rollis trolley is no more than 180 kg, it is not useful to have a leveling dock. A simple polycarbonate sheet is enough to ensure the crossing between the dock and the truck. The sheet is free and centered in the truck, avoiding lateral holes related to the sides of the dock leveler.

A system along the width of the dock absorbs the shock of the truck while reversing even in multiply mode. The system allows the up and down suspension:

- Smooth concrete wall (no dock leveler)
- Centered sheet in the truck
- Shock absorber system against any maneuver type

Rollis® Loading Dock		L0448
Length	mm	3100
Width	mm	260
Height	mm	700
Ankle Fixing	Ø	10 x 65

For more information about the system, do not hesitate to contact us.



A polycarbonate sheet between the dock and the trailer allows the Rollis® loading and unloading



Shock absorber system when trucks park up to the dock

New

Rollis Elevator

Load Rollis trolley into trucks without a dock



Low position



Lifting



High position



Connexion with the truck

Companies do not always have a dock that allows them to load trucks directly into Rollis trolley. This is why Labadis offers an elevator allowing the smooth use of the Rollis system.

- operated by a standard forklift
- crossing: Rollis go in and out in a straight line while they remain coupled by 2 (no reverse gear)
- Taken on both sides by a forklift
- Safety lock
- takes any type of trolley from 400 wide up to 1200 long

Rollis elevator		L0181
Compartment		
Length	mm	1200
Width	mm	400
Rollis Ability (400 x 600)		2
Maximum load	kg	360
Exterior Features		
Length	mm	1320
Width	mm	1520
Height	mm	2865
Fork height	mm	2825
Empty weight	kg	200
Total mass	kg	560

Rollis® Pallet

Introduce logistics to a new transfer mode

The transport on Rollis is confronted by pallets in Logistics.

To gradually set up the Rollis system within the workshop, Labadis has developed a Rollis Pallet easy to use, safe and intuitive.


- Passing through: Rollis go in and out in a straight line while they remain coupled by 2 (no reverse gear)
- Taken on both sides by a handling machine
- Intuitive and maneuverable locking without bending down thanks to the Rollis towing hook
- The 4 Rollis go in and out in less than 1 minute
- Stackable with a cover which optimizes truck filling
- The cover is attached with 2 straps (avoids strap fixing in the truck)
- Transport all wagon 400x600 on the market
- Introduction of forks by sliding on the floor
- To be lifted with forklift or low pallet jack 69 mm high maximum



Locking latches are opened without bending down




Rollis® trolleys are coupled with the towing hook (**L0005**)

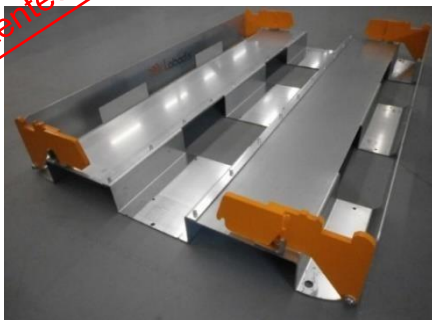

Rollis® pallet




2 Rollis Pallets with a cover

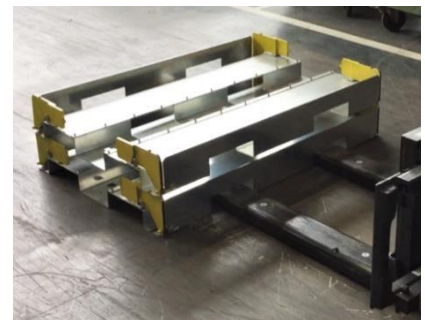

Forklift handling on both sides

Rollis Pallet		L0378	L0599
Length	mm	1 251	1 208
Width	mm	808	851
Height	mm	160	160
Weight	kg	40	44
Capacity for Rollis 400 x ...	400	6	-
	600	-	4
Maximum Load	kg	4x180	2x180
Rollis space	mm	80	
Pallet Side		Width	Length
Minimum Height for fork Handling	mm	69	69
Internal Distance between Fork	mm	190	300
External Distance between Fork	mm	612	740
Cover		L0141	
Length	mm	1208	-
Width	mm	808	-
Weight	kg	2,9	-
Material		HDPE	-

Kanban system

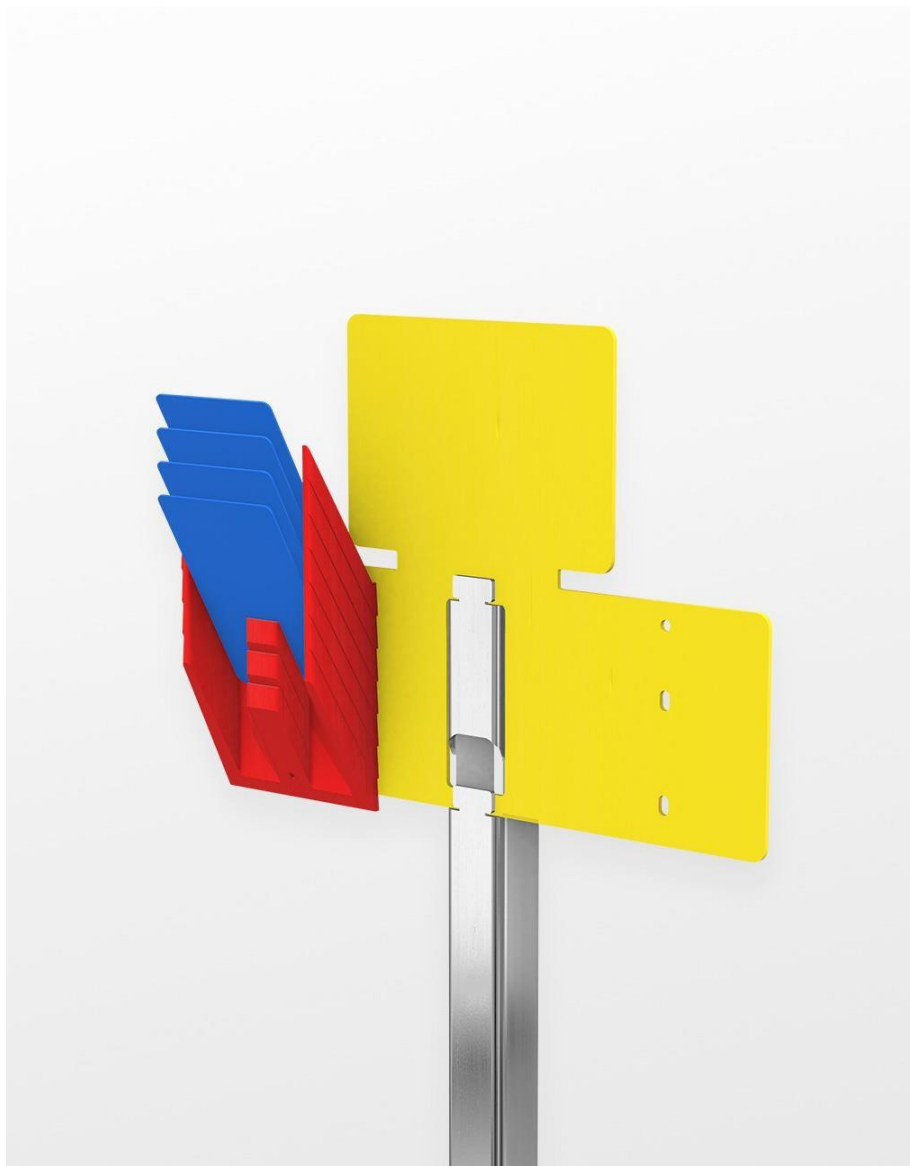

Management with fixed-batch Kanban System


Make the workshop self-ruling in manufacturing management

The fixed-batch Kanban System is used to automate scheduling and launching production which makes the workshop autonomous.

The Kanban System has 2 Loops:

- The **Picking** Loop which is used to supply production lines
- The **Production** Loop which is used to schedule production work

Each Kanban Loop has its specific equipment:

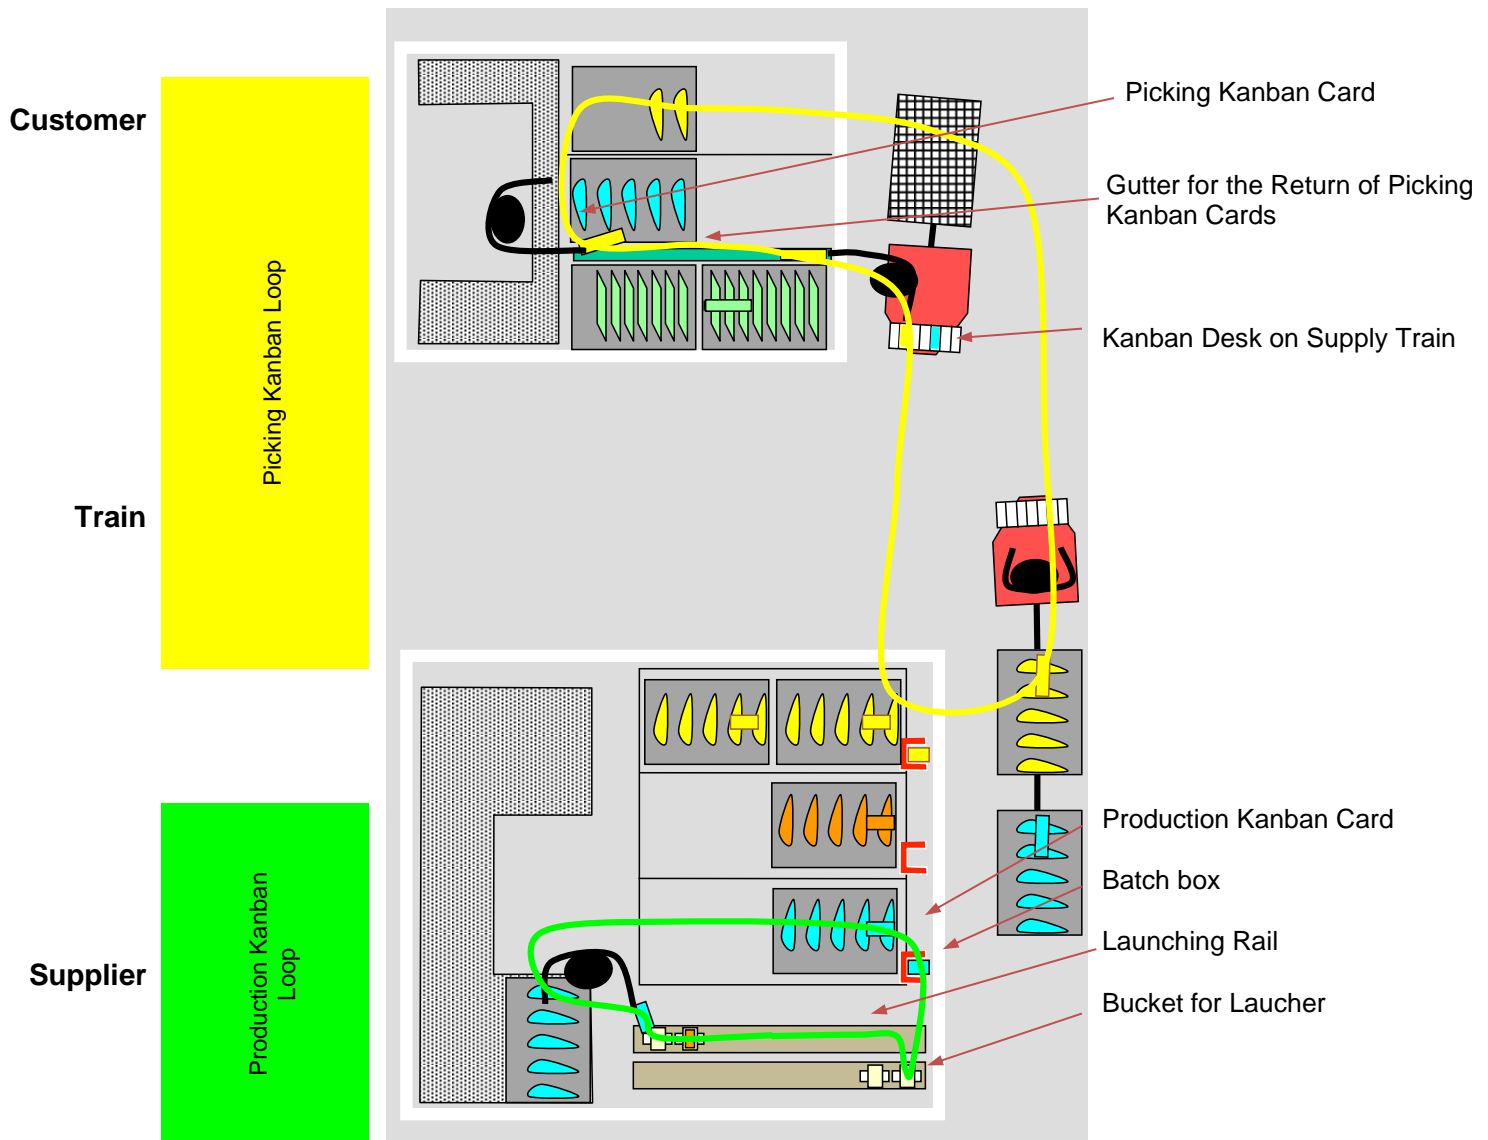

The above layout is streamlined in order to see all the components of the Kanban System Loops; however, it does not reflect reality.

Labadis company helps its customers to organize the Kanban System through a "hands-on training".

The Kanban system requires some previous steps which we can help you to set up.

Please [consult us](#)

Heijunka board


Smooth the workshops work by simulating the customer's expectation

The Heijunka Board enables to reproduce a smoothed and a mixed customer's request. The cards which correspond to the customer's packaging are spread over the work time slot of the workshops. The logistics staff regularly picks up the cards to make up the load of the shipping truck (called Dummy Truck). Thanks to the Heijunka Board, the firm entirely works using in Just-In-Time methods.

The free-standing position of the Heijunka Board allows moving it according to new layouts which often happens in warehouses. As the time slots are vertical, columns can be added according to the references to be picked. A visual control of a good picking in the workshop is thus possible.



Heijunka Board on stainless steel Stand

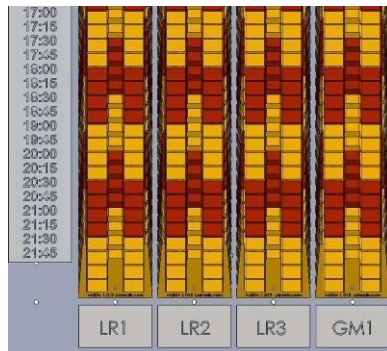

Colors alternation enables to find each time slot



The horizontal time slots enable to have a view on the picked references

Heijunka Board		L0132
Width x Height	mm	1052 x 1910
Weight	kg	32
Column Numbers (references)		12
Max Row (Vertical Slot for Kanban)		60
Time Slot according to the train's period	10 min	10 h
	15 min	16 h
	20 min	20 h
	30 min	24 h

Board Title on request


Logistics Board

Visual Management on your Remote Stocks in Kanban

The Logistics Board helps to visualize a remote stock status. A Kanban stock management is thus possible. The pickings are taken out of the logistics board and the batch building boxes launch the production. It is a visual tool called VRO (Visual Re-Order). The supplier's restocking can also be managed from the raw material stock.



Logistic board on stainless steel stand

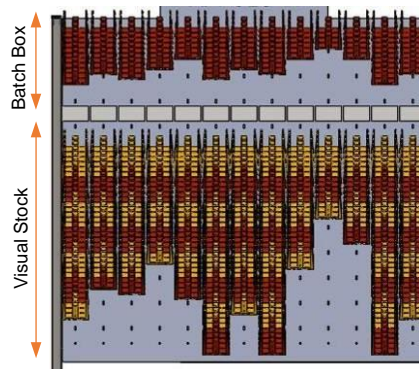

Batch building boxes are on the top and stock visualization on the bottom

Logistics board		L0338
Width	mm	1052
Height	mm	1910
Weight	Kg	32
Column Numbers (references)		13
Row (Vertical Slot)	maxi	60
Structure Raw Material		Stainless Steel

The batch building boxes are made with elements which are separately proposed (Look at p.68)

Kanban Picking Loop

Kanban Picking Cards


- Large size to prevent from loss and to enable an easy handling
- Intensive use without any abrasion or peeling (safe down slide in the gutter)
- 54 mm wide for a good handling with one hand
- Containers can be handled with card in the hand
- Businesslike look that values the cards towards operators (no loss)
- Rigid card for a safe slide in the gutter
- One shot printing (no more plastic-covering)
- Available in stainless steel with laser marking to go through washing machine



Information stays visible while holding the card



The supplier is carrying a container while holding the card in his hand

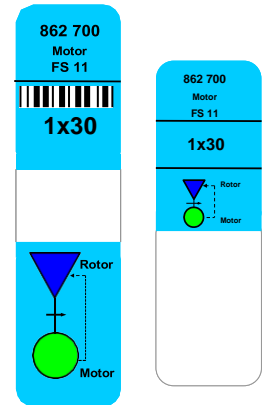

L0090

L0095

Picking Kanban Card		L0090	L0095
Length	mm	210	165
Width	mm		54
Thickness	mm		0,76
Weight	g	10,5	8,3
Raw Material			PVC
Box Type		Standard	« Butter » box
Number per Pack			200




Card can be inserted directly into the cardboard slots to identify its contents. Information on Kanban is always visible

Gutter for Picking Kanban's

The gutter allows the customer to send the cards right back on the other side of the line, where the supply train goes through. So, the card cannot get lost.


- Low slope (20°) allowing long lengths
- Can be fixed on both sides (as well as on the right as on the left)
- Adjustable length by cutting with pliers
- Compatible with a 1 800 mm long front feeding (e.g. 3 containers 600)
- Placed onto the Holding brackets **L0195** between [2 storage poles](#)

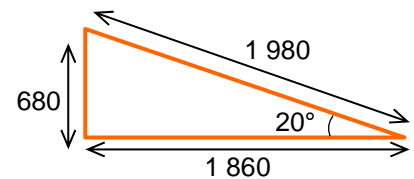

Card comes back through the front supplying when the train goes through



Card is visible for the train and easy to collect

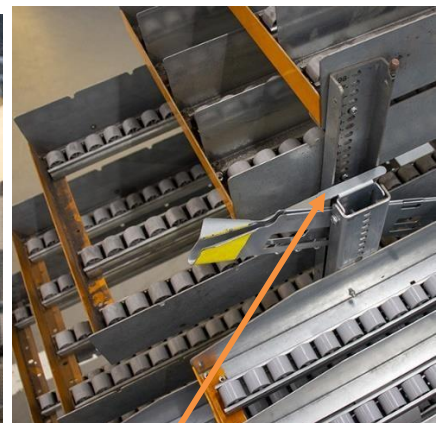

The spacer (**L0479**) creates a space for the gutter between 2 Racks

Kanban Picking Loop

N.B : The slope depends on the Bracket cleanliness and on the cards' qualities : dimensions and stiffness.

Gutter		L0660	L0661	L0662	L0663
Maximum Length Overall	mm	1300	1700	2100	2500
Rail Width	mm	16			
Height	mm	76			
Raw Material		Stainless steel			
Number per Pack		4			
Conditions of Use					
Maximum Fixing Screw Diameter	mm	8			
Minimum Slope	°	20			



Plastic-coated cards finally get dog-eared and block the gutters. We request a [printed cards](#) use.

Kanban Desk for Supply train

The desk enables to store Kanban cards straight away according to their destination. They cannot be lost anymore. This structures the supplier's job. Destinations are written on labels according to the train path. The desk is fixed on the [Ergomover](#) in the 2 provided holes with tightening screws.



The Kanban desk is fixed in the top holes of the Ergomover. No adaptation is needed.



Picking place is written on sticky labels. Their sequence describes the train path

Kanban Desk		L0046
Characteristics		
Place Number for Cards		9
Card Storage Length	mm	158
Color		RAL 9006
Raw Material		Stainless Steel
Conditions of use		
Kanban Cards Overall Size	mm	54 x 210




Optional: a Timer (**L0342**) to rate the supply trains work. Be careful, timing is obtained by the works organization, not by the timer

Kanban Production Loop

Kanban Production Card

Kanban cards provided are in PVC. They enable:

- One shot printing (no more plastic coating)
- Intensive use without any abrasion or peeling
- Businesslike look that values the cards towards operators (no loss)
- Available in stainless steel with laser marking to go through washing machine



Standard Information



Stainless steel Kanban Card

Production Kanban Card		L0089
Length	mm	86
Width	mm	54
Thickness	mm	0,76
Weight	g	4,3
Raw Material		PVC
Number per Pack		400

Batch Building Box

Batch Building Box allows to collect Kanban Cards as and when the train withdraws. Boxes are directly placed on the Picking area, either on the [storage Units poles](#) or on the [storage Racks](#).

This avoids unnecessary coming and going of the picking train.

- The box is made with components that fit together
- Batch building box has as many slots as there are in the batch: the picker cannot make any mistake
- Two lateral slots enables to pick up the cards quickly
- The Loop Inventory Card is fixed on its back with a screw (no one can take it away)
- Can also be used to make scheduling boards
-



Batch Building Box elements assembled together



Batch Building Box placed on the Storage Units Pole



Batch Building Box setting on the Storage Units Pole

Delivered with 20 stainless screws PZD M 3,5 x 6,5 in a box of 100 modules for Batch Building Box

Batch Building Box		L0015
Width	mm	60
Depth	mm	32
Assembling Interval	mm	12
Weight	kg	0,09
Raw Material		ABS
Number per Pack		100
Rack Holder		L0542
Usefull Heigth for Batch Building Box	mm	320
Raw Material		Steel
Assembling on Rack Pole		Screwing



Storage Rack Holder for Batch Building Boxes (L0542)

New

Kanban Production Loop

Bucket

When a batch is complete, the supplier (customer) returns the cards as production orders by putting the cards in the bucket. It is then conveyed to the production station to inform which goods have to be produced.

- Card can be seen from the front
- Very low slope thanks to shaped axles (6° minimum)
- Cards do not overflow out of the bucket and cannot be stuck by a pole
- The bucket is equipped with wheels: a simple U-shaped rail is enough



Cards arrive in the bucket in front of the operator in production order. The several cards show the references which have to be produced



The card is visible while the bucket slides down

Bucket		L0009
Length	mm	90
Width	mm	60
Height	mm	71
Weight	kg	0,25
Sold per		6

Launching Rail

The Launching Rail guarantees FIFO (First In First Out) of productions orders, thanks to filled Kanban Bucket. It helps the producer to visualize the sequence. It also gives the supplier the delivery order in case of sequential deliveries.

- Fixed on [flat storage pole](#) with holding brackets (**L0195**)
- Low slope that allows an ergonomic loading and picking (6° minimum)
- Supplied cut to length with a stop for the buckets
- Double-sided sticky foam fixing for any kind of support

Launching Rail (**L0196**) is sold to length ready to be assembled.



Rail fixed on holding brackets (**L0195**) with double-sided sticky foam



Launching Rail (**L0196**) fixed by 2 holding brackets (**L0195**) on storage units poles

Kanban Cards Printer

Simplifies Cards Making

Kanban system relies on the card flow. To be reliable, they must slide correctly in the gutter. Plastic-coated cards peel off and they get stuck in the gutter. The Printer allows to have monobloc cards which remain stiff, without cornering.

The Printer is connected to a PC computer, Windows configured, using an USB cable or Intranet Network with Ethernet Port.

Cards are printed from a "PowerPoint", "Excel" or "Word" file.

Barcodes can be printed.



Install like any other peripheral computer with a network or local connection.

Production Kanban Cards (credit card size: 54 x 86 mm) are printed with a automatic card feeder.

Picking Kanban Cards for standard container or "butter" box, 210 and 165 mm long respectively, are printed with the adaptor provided with the machine.



Kanban Printer		L0091
Characteristics		
Printing Speed Color	s / Card	24
Printing Speed Black & White	s / Card	3,6
Weight	kg	5,9
Length / Depth / Height	mm	396 / 235 / 192
Definition	dpi	300
Alimentation		
Voltage	V	100-240
Frequence	Hz	50-60
Connexion		
Local	Plug	USB
Network	Plug	ETHERNET



Printed Production Kanban Card (L0090)

Print Ribbon is also sold separately: one box contains 5 ribbons and 1 cleaning kit.

Print Ribbon		L0093	L0185
		Color	Black & White
Printing Capacity	1 / ribbon	200	1 000
Packaging Cardboard Size		215 x 155 x 75	
Weight	kg	0,8	
Ribbon	Quantity	5	
Cleaning Kit	Quantity	1	

Kanban Game

Give to everyone the possibility to understand the Kanban System to comply with the rules

To ensure a smooth running of the Kanban System, everyone must follow the rules. Kanban Game allows everyone to understand the system thanks to Kanban Cards used at different workstations. It is possible to simulate frequent mistakes:

- Invert batch to avoid a reference change
- Supply more than scheduled
- Lose a card

For Kanban Loop Managers, their Loop sensibility can also be tested more or less tightened, and learn by calculation, to define a steady Kanban Loop.


The game represents a plant which produces 3 finished products and 2 subsets made from 5 bought pieces. The game simulates:

- The customer's truck
- The dispatch with the "Heijunka Board" (or sequencer)
- An assembling line with its batch building boxes, its launcher and its Kanban gutter
- A press
- A supply train with Kanban desk
- A receiving area with flat area



Koyo

The players produce and supply according to Kanban instructions

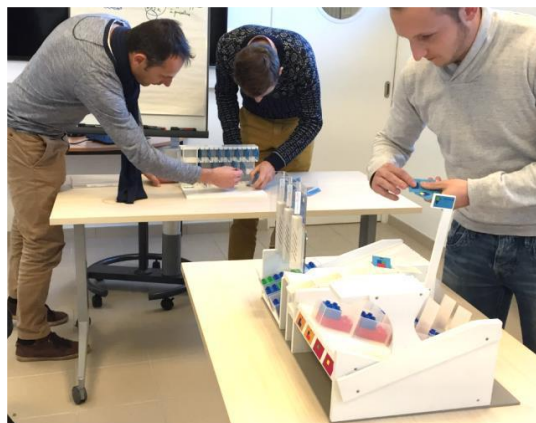

Mécafi

Players get involved and integrate the Kanban role in the plant activity

The game lasts 1 to 2 hours according to the kind of exercises. Six players at least are necessary. It is possible to rent the Kanban Game (**L0013**).

Kanban Game		L0013	LL0013
Length	mm	600	670
Width	mm	400	440
Height	mm	1 220	960
Weight	kg	39	44



Kanban Game (**L0013**) on Hightened Rollis®

Visual communication



Zoning Floor tape solutions

Make your workshop's layout clear for anybody

To structure a flow clearly, we define each independent working area (machine or assembling line) by a continuous line. This allows anyone to take ownership of their area and gives them responsibilities. Likewise, it structures exchanges.

Horizontal Zoning Floor

The self-adhesive tape is suitable for smooth floors; it supports the passing of the Rollis wheels. This very thin tape does not peel. It can be removed with a scraper or a heat gun.

The tape is placed on a plastic support. So it can be unrolled, positioned first and then be stuck.

The tape is ready immediately, it is no longer necessary to wait for the paint to dry.




Hermès

The tape position is tested...



Hermès

...before its final sticking

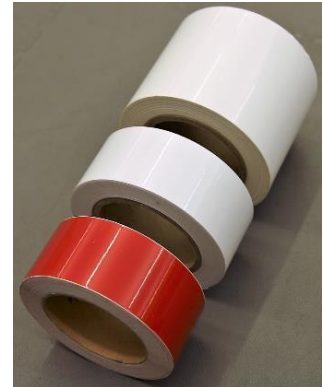

Range of adhesive tapes

Adhesive Tapes Box		L0001
Box Weight	kg	14
Each Roll Length	m	25

Box contents:

- 14 white rolls 100 mm wide for the edge of zone
- 6 white rolls 50 mm wide for mobile objects
- 2 red rolls 50 mm wide for defective pieces



We can replace a 100 mm wide roll with 2 rolls 50 mm wide, with a maximum of 6 red rolls

N.B: Limited lifetime on tiles with retracted joints

Vertical Zoning

It allows to:

- Create a corridor to prevent the operator from running into a machine
- Avoid going under high structures
- Naturally guides the operator without closing the area off with a wall
- Be the alternative to floor zoning when its surface needs to be cleaned constantly (strong water jet, solvents)

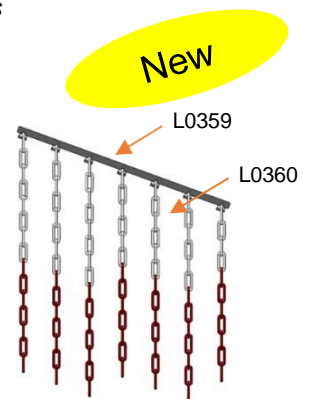

The chain is positioned on the stainless-steel rod

Stainless Steel Rod		L0359
Length	mm	800
Width	mm	40
Interval between 2 chains	mm	115
Weight	kg	0,125
Red and White Chain		L0360
Length	mm	25 000
Diameter	mm	8

Labadis follows its customers in setting up zoning and rational implementation techniques that allow surface gain and fluid flow between trains and staff.

Management QCDDM

Manage the performance and improvement of each flow step on the floor

A plant flow is a succession of independent production zones. In order to manage at best the workshop, it is useful to involve operators in the daily performance follow up and improvement actions.

The visual QCDDM communication is modular because each panel is standing by itself. That allows to adjust at best the display needed. While minimizing the surface needed, panels can be displayed as close as possible to the operators.

Actions decided with production management are written on the spot and validated by the user. This improving process ensures sustainable performance. The follow up table is printed on the board. As soon as an action is done and validated, we erase the line: we do not store problems. The board makes the team turn towards action.

Panels are kept magnetized on the board (p.57). So it is easy to move to the next level meeting or to the monthly meeting: the operator then makes the connection between decided actions during the work meeting, their follow-up on the floor and sized performance.

Grids, printed in the mass, resist to repeated wiping. A brush provided with the board (p.57) is the same size as an action line. A PDCA wheel enables to ensure check and validation.

Copyright



L0022

« INFO »

Erasable surface for the zone information

Plexiglas for horizontal / vertical A4 display

Each team can sign after reading

Look at the different indicators in the table below

Performance: « Quality », « Cost », « Delivery »

A weekly follow-up for each team (EAP). At the end, the team calculate their indicator and record it

A weekly follow-up during 6 months enables to follow the trend

Management and operators follow their action plan with PDCA follow-up

L0023

Miscellaneous follow-up

3 Plexiglas displays for horizontal or vertical A4 size for dedicated follow-up:

- Self-maintenance
- Safety
- Goods Lists...

Quality	
L0016	Customer Return (ppm)
L0017	Defect Rate (ppm)


Cost	
L0018	Productivity (p / p / h)
L0019	TRP (%)
L0049	Production Yield (%)

Delivery	
L0020	Service Rate (%)
L0021	Change Over Time (min)


TRP = Total Rate of Production: % of time when machine produces good pieces. An indicator of reliability and flexibility.

Time line tracking available:

- By team weekly
- By week monthly

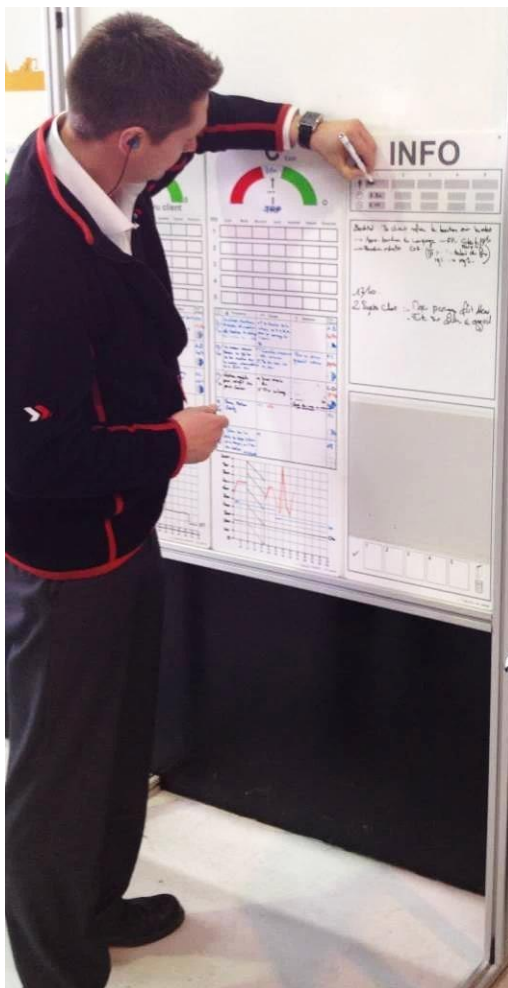

Tracking Panel in the workshop

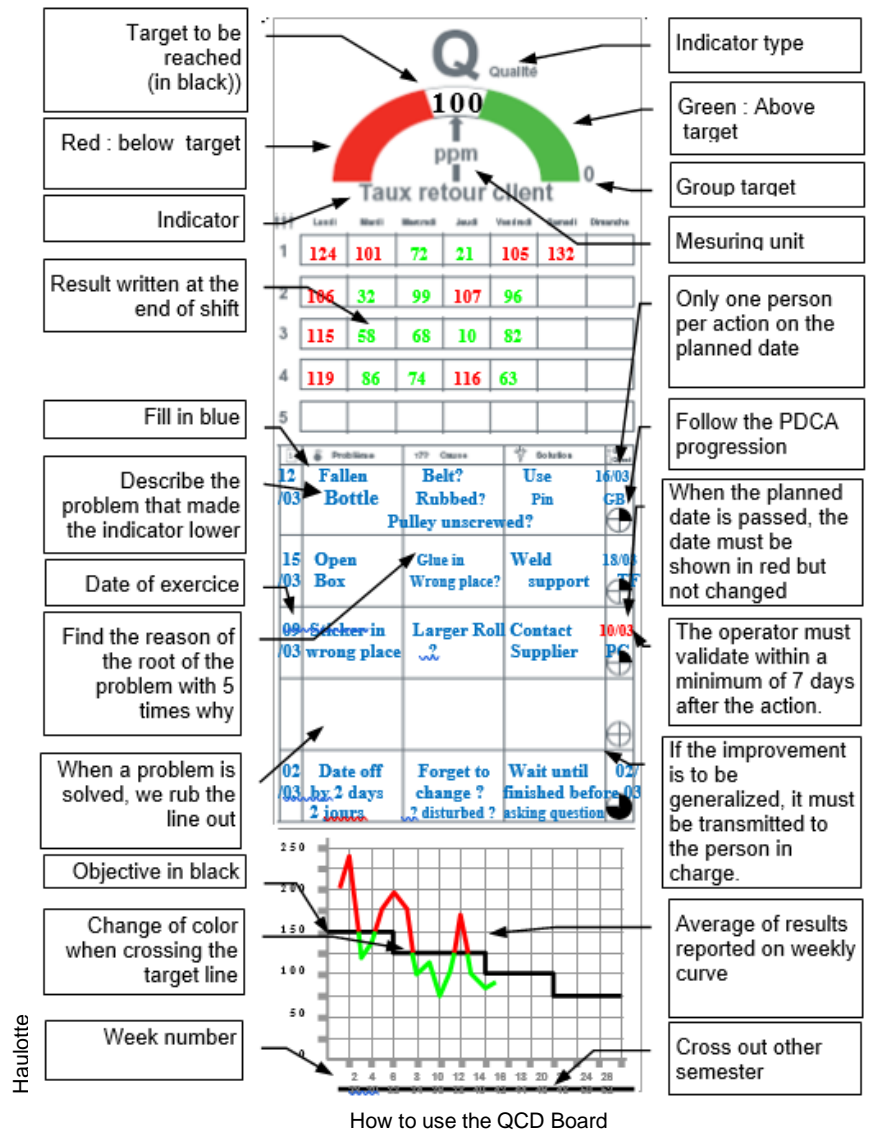

Labadis provides consulting for consistent QDCM Management setting up and operators training in order to easily adapt them to the tool. This implementation previously requires to lighten the flows with zoning which leads to create autonomous production area, so autonomous production teams, as well as the decision-making analysis and management meeting.

Tracking Panel		
Length	mm	900
Width	mm	320
Weight	kg	0,960


Presentation Board for QCDM Panels

Boards are suitable for QCDM and INFO panels:

- The magnetized panels can be placed directly onto the metal blue board and can be moved individually to a meeting room if needed: the operator establishes the connection between decided actions during the work meetings, their follow-up on the floor and measured results
- Comes with your own title in white letters
- Delivered with 4 whiteboard pencils: green, red, black and blue
- Caps are integrated into the structure: whiteboard pencils recover naturally their starting place
- Brush is integrated into the board; its size suits a line erasing of the action plan
- They're within place protects them from clashes
- Flat board feet avoid tripping over
- Stainless steel structure gives a neat and rewarding look that resists shocks



The operator follows his tool performance from his workplace

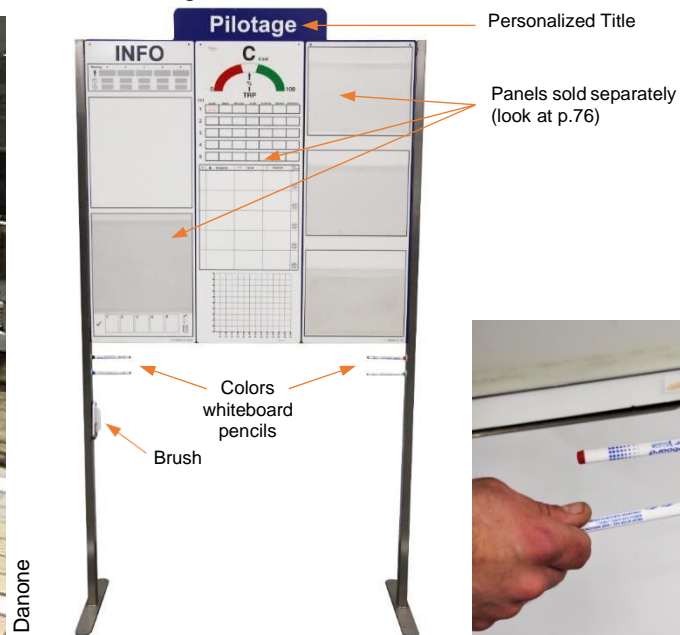

Presentation Board stands by itself and easy to move



Fixed Caps: pens do not disappear anymore!



The brush erases one line at a time

Presentation Board		L0068
Overall Height	mm	1865
Usable Height	mm	900
Width	mm	1056
Depth	mm	225
Thickness on the floor (foot)	mm	5
Weight	kg	20

Lean Workshop Panel on pole

Manage improvement on the floor with structured communication

The Workshop Panel helps structure clearly and synthetically improvement team's work during their construction. This panel is placed on the workshop area itself. It can be moved to a meeting room if needed, where teams document their work and their action plan. It helps management grasp at a glance the working status and engage in an action-oriented dialogue.

A panel works for any type of workshop. How to use the panel is written under each document. This makes the launching and the coaching easy.

- Allows to document any type of workshop (5S, Zoning, GRP, Hoshin, STAP, Train, SMED, TPM...)
- Only one title per folder indicates the document that must be used
- Notice Use for each document
- 3 folders for horizontal A4 paper
- Papers protected against spilling
- The workshop method is summarized on a form
- Hanged with "S" hooks or magnetic tapes
- All documents may be downloaded from our website
- Reusable after each workshop

All in One



Lean Workshop Panel

The Workshop stainless steel Pole is with flat feet which avoids tripping over. Easy to carry.




Pepsico



Knorr-Bremse

Workshop Panel placed in the workshop area eases discussions and exchanges

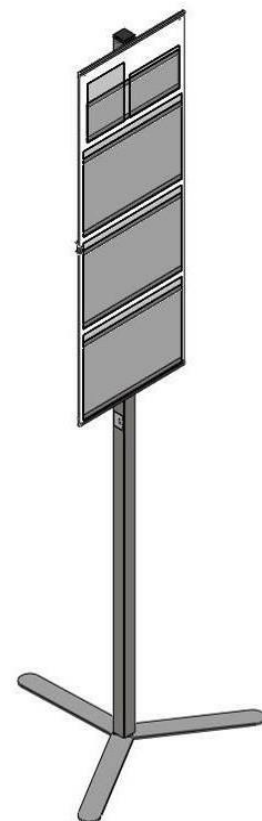

Workshop Panel on a Stainless-Steel Pole

Lean Workshop on Pole		L0025
Overall Height	mm	1795
Width	mm	320
Feet Diameter	mm	620
Weight	kg	4,840

Technical Workshop

Technical Consulting in Lean manufacturing

Improve Production Performance while training the staff

You need to:

- Improve the workshop Productivity
- Automate Operations
- Reduce Production Areas
- Simplify Material flows
- Reduce Stocks
- Improve customer delivery lead-time
- Improve Ergonomics
- Reduce handling accidents and damages

We can help you by acting with you on the spot:

1. We analyze the situation with you and help you to understand it
2. We propose you technical solutions
3. We set them up together at your own pace
4. We follow a method that you learn while you practice it



Knorr-Bremse

Workstation study with the operator



Standard Packaging Research for a set of pieces

We help you to set up:

<p>Toyota Production System Techniques: Lean Manufacturing</p> <p>Flow Analysis (VSM), Hoshin, GRP, SMED</p>	<p>Flows Structuring with Steward Method</p> <p>Packaging, Workstation Supply, Small Train, Flat Storage, Kanban</p>	<p>Workstation Management</p> <p>Zoning, First Quality, QCDM Management and 5S</p>	<p>New Factory Projects</p> <p><i>Design Process:</i> Line or machine conception <i>Layout:</i> Plant Layout in general</p>
---	---	---	--

The Lab

Design and test your lines quickly

New

The assembling line design requires reflection and a detailed work. Labadis has a dedicated area to allow you to escape your daily work, and design quickly and methodically your lines. Labadis plant uses new methods that would generate ideas for solving your productivity and ergonomics constraints.

The work done in the Lab is broken down into 3 steps:

1. Design



- Current situation analysis: trouble and reasons
- Quantitative and qualitative purpose list
- General principle
- Looking for solutions

2. Implementation



- Tuning stations
- Detailed design
- Station setting up

3. Use



- Defined station simulation in real size
- General layout simulation inside the factory
- Time and earnings measurements

To improve its own productivity, Labadis has developed several applications by using the One-Piece Flowprincipal. Our workstation illustrates the various combinations of Labadis® system use.



one piece at a time
supply at the station
(Minomi)



Hand washing ramp in four steps:
cleaning, rinsing, drying, styling



Amended riveting tool:
Lightweight (without accumulation of rivet tails)
Ergonomic (right wrist taking)